




CLEANROOM AND HOSPITAL

construction system solution

洁净室、医院建设系统解决方案

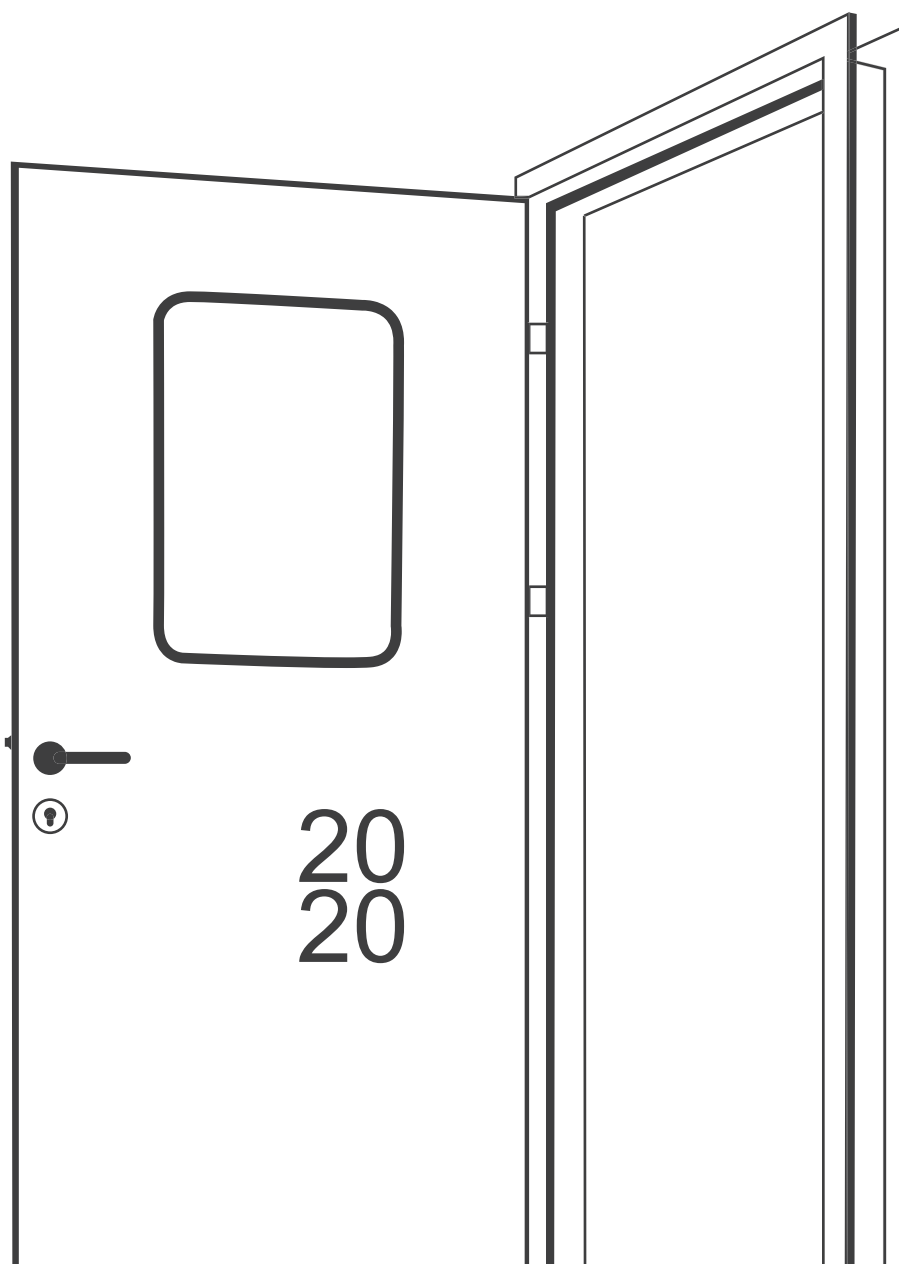

CLEANROOM AND HOSPITAL CONSTRUCTION DOOR

易众简介

广州市易众铝业有限公司于 1996 年，以“三和”始创于广东省广州市，发展至今 20 多年，分别在佛山、东莞、中山、台山地区设有分公司和工厂，是华南地区洁净行业里最专业，最配套完善的一家企业。

公司集洁净室净化铝型材、空调机组边框铝型材、风口铝型材及洁净室门、医用自动门、平开门、风口等系列产品的研发生产与销售于一体。产品广泛应用于医疗卫生、生物制药、食品饮料、化妆品、机械电子等行业领域。其产品生产引进全套的数控加工设备，质量在同行业中处于领先地位。（现有厂房面积 3 万多平方米，企业员工 300 多人。）

自成立以来，易众自主研发的产品先后获得“外观设计专利认证”、“发明专利认证”“实用型专利认证”、并通过了“ISO9001”质量管理体系认证。公司不断引进领先行业的管理模式以及生产设备，始终以精工标准专注打造环保、引领时代潮流的铝材和产品。先进的生产设备，科学的流程控制，严格的质量检测，奠定了易众驰骋市场的坚实基础。

未来易众将继续贯彻技术、品质、服务三位一体的经营战略，以不断创新的技术，卓越的品质，优质的服务，与客户携手共进，共创辉煌！



Company profile

Guangzhou Yizhong Aluminum Industry Co., Ltd founded in Guangzhou, Guangdong province in 1996 named “SANHE ” ,has been developing for more than 20 years with branches and factories in Foshan, Dongguan, Zhongshan and Taishan. Yizhong (E-ZONG) is the most professional and perfect in the clean industry in south China.

The company integrates R&D, production and sales of clean room aluminum profiles, air-conditioning unit frame aluminum profiles, air diffuser aluminum profiles and clean room doors, medical automatic doors, swing doors, air diffuser and other aluminum products. Products are widely used in medical and health, bio-pharmaceutical, food and beverage, cosmetics, machinery and electronics industries. The production of its products introduces a full set of CNC machining equipment, and its quality is in a leading position in the same industry. Now Yizhong (E-ZONG) is occupying plant area of more than 30,000 square meters, having more than 300 employees.

Since its establishment, Yizhong (E-ZONG) has obtained the "Appearance Design Patent Certification", "Invention Patent Certification" and "Practical Patent Certification", and has passed the "ISO9001" quality management system certification. The company constantly introduces the management mode and production equipment of the leading industry, and always focuses on creating environmental aluminum products and making our products leading the trend of the highest standard. Advanced production equipment, scientific process control, and strict quality test have laid a solid foundation for Yizhong (E-ZONG)'s market.

In the future, Yizhong (E-ZONG) will continue to implement the business strategy of technology, quality and service. With innovative technology, excellent quality and service, we will sincerely work together with you all to create brilliant future!



荣誉证书

HONOR CERTIFICATE

对易众的工作给予肯定的象征，专利证书是专利申请经审查合格，发给专利申请人的专利证书，是一种法律证明文件。

Affirming the work of Yizhong. The patent certificate is a qualified patent application after examination. Patent certificate issued to patent applicant. Is a legal document.



合作客户

PARITAL CUSTOMERS

多年来，公司的足迹遍布全国，为祖国的经济建设留下无数个辉煌杰作。我们的每一处工程无不体现易众的优良品质。通过合作者们卓有成效的努力，使易众品牌深得用户喜爱与信赖，并得到专家肯定。

Over the years, our footprint is spread throughout the country, also for the motherland's economic construction made great contributions. Each of our projects reflects the excellent quality of E-ZONG, through the effective efforts of the collaborators, so that the customers love and trust the brand! And get expert affirmation.



6

6 大核心技术 6 Core Technologies

选择我们与高质量同行

选择我们没有错

全心全意提供优质服务 持续技术创新

For high quality, it's wise for you to choose us
Dedicated to provide quality services, continuous technological innovation



NO.1 圆弧设计 防撞防刮
Arc design Anti-collision and anti-scratch



NO.2 创新合页防粉尘
Innovative hinge to prevent dust



NO.3 面板的物理固定结构
Physical fixing structure of panel



NO.4 观察窗的物理固定结构
Physical fixing structure of observation window



NO.5 观察窗无菌斑 不起雾
Observation window sterile spot



NO.6 面板洁净抗菌
Panel clean and antibacterial

生产实力

Production Ability

公司拥有一套完善的质量管理体系
及一系列具有国际水平的生产、检验、调试设备
多年的产品制造经验

造就了一批经验丰富、技术熟练的技术人员和制造工人队伍

The company has a complete quality management system

And a series of production, inspection and debugging equipment with international level

Years of product manufacturing experience

Created a group of experienced and skilled technicians and manufacturing workers



工程案例

Case

拥有专业的设计团队

根据客户需求，提供合适的净化工程方案

配备高标准化设备

易众 已为多家大型医院提供解决方案

Have a professional design team

According to customer needs, provide appropriate purification engineering solutions

Equipped with highly standardized equipment

Yizhong to provide solutions for many large hospitals



应用领域

APPLICATIONS

产品广泛应用于医疗卫生、

生物制药、食品饮料、机械电子等行业

专注于为洁净室、医疗建设提供系统的解决方案

Products are widely used in medical and health,

Biopharmaceutical, food and beverage, machinery and electronics industries

Focus on providing system solutions for clean room and medical construction



E-ZONG

为您缔造完美产品

Creates Perfect Products
For You

外包装间
AYX355

目录 Content

钢质门 Steel door	01
平开门 (40 门扇) Swing door (Door leaf thickness 40mm)	05
平开门 (50 门扇) Swing door (Door leaf thickness 50mm)	09
半玻璃平开门 Half glass swing door	13
玻璃平开门 Glass swing door	17
墙体气密平开门 Swing door for brick wall	21
医用铅防护门 Medical lead protection door	29
气密自动门 Airtight automatic door	33
玻璃气密自动门 Glass airtight automatic door	37
双层中空玻璃窗 Double insulating glass window	41
送风天花 Air ceiling	43
医疗设备带 SB007 Medical Bed Head Unit SB007	45
医疗设备带 SB008 Medical Bed Head Unit SB008	46
医疗设备带 SB010 Medical Bed Head Unit SB010	47
医疗设备带 SB013 Medical Bed Head Unit SB013	48
推荐色板 Recommended color plate	49
门型图 Door type	50
配件 Accessory	51

钢质门

Steel door



产品特点

- 铝合页采用圆弧设计，轴心增加尼龙袖套，摩擦无粉尘
- 门框独有的密封条，密封性强，降噪隔音效果好
- 钢制门板，防撞，不易变形，易清洁
- 款式多样，支持尺寸定制


Feature

- The aluminum hinge adopts a circular arc design, and a nylon sleeve is added to the axis, and there is no dust in friction
- The unique sealing gasket of the door frame has strong sealing performance and good noise reduction and sound insulation effect.
- Steel door panel, anti-collision, not easy to deform, but easy to clean
- Various styles, customized size



产品细节 Product details



- ① 合页 Hinges
- ② 门扇角 Door Leaf corner
- ③ 门锁 Lock
- ④ 门缝 Door gap
- ⑤ 门框角 Door Frame corner
- ⑥ 门扇 Door Leaf



结构示意图 Structure Diagram

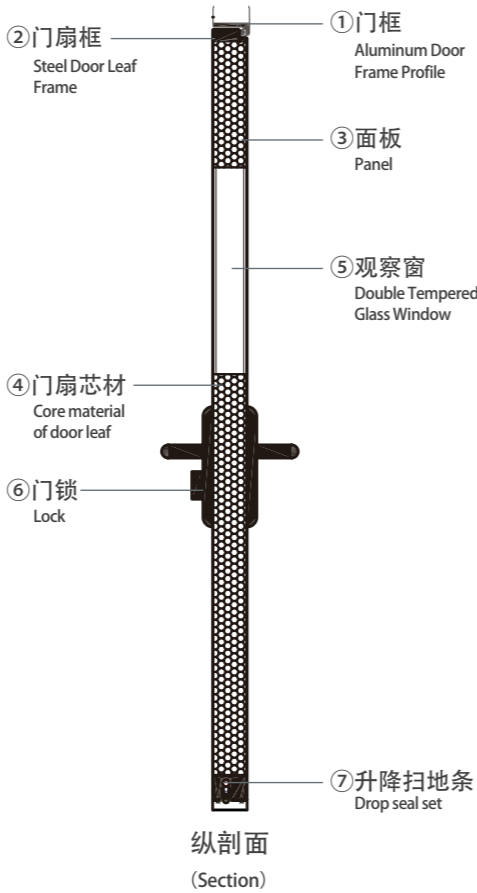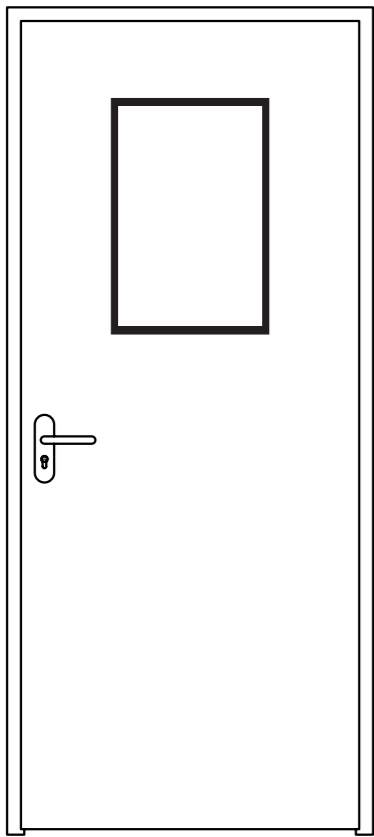

技术参考

门洞常用宽度 (mm)	单开门	子母门	双开门
	800/950	1200/1350	1500/1800
门洞常用高度 (mm)	2100		
门扇可开启宽度	0° ~170°		

类型选项

种类选择	机制板	手工板
墙厚 (mm)	50、75、100	50、75、100
面板类型	彩涂板	
门扇厚度 (mm)	50	
观察窗尺寸 (mm)	250×650、450×650、400×600	
锁具类型	执手锁、分体锁、逃生锁、不锈钢拉手	
门控类型	明装闭门器、互锁、电动平开门机	


Technical reference

Normal width of door hole(mm)	Single door	Unequal double door	Double door
	800/950	1200/1350	1500/1800
Normal height of door hole(mm)	2100		
Opening angle	0° ~170°		

Type option

Type	Sandwich panel	Handicraft panel
Wall thickness(mm)	50、75、100	50、75、100
The type of panel	Colored GI panel	
Door leaf thickness(mm)	50	
Observation window size (mm)	250×650、450×650、400×600	
The type of lock	Handle lock,Split lock,Push type panic bar, SUS handle	
Access Control	Exposed door closers,Interlocking, Electric swing door motor	

产品爆炸图 Assembling Drawings

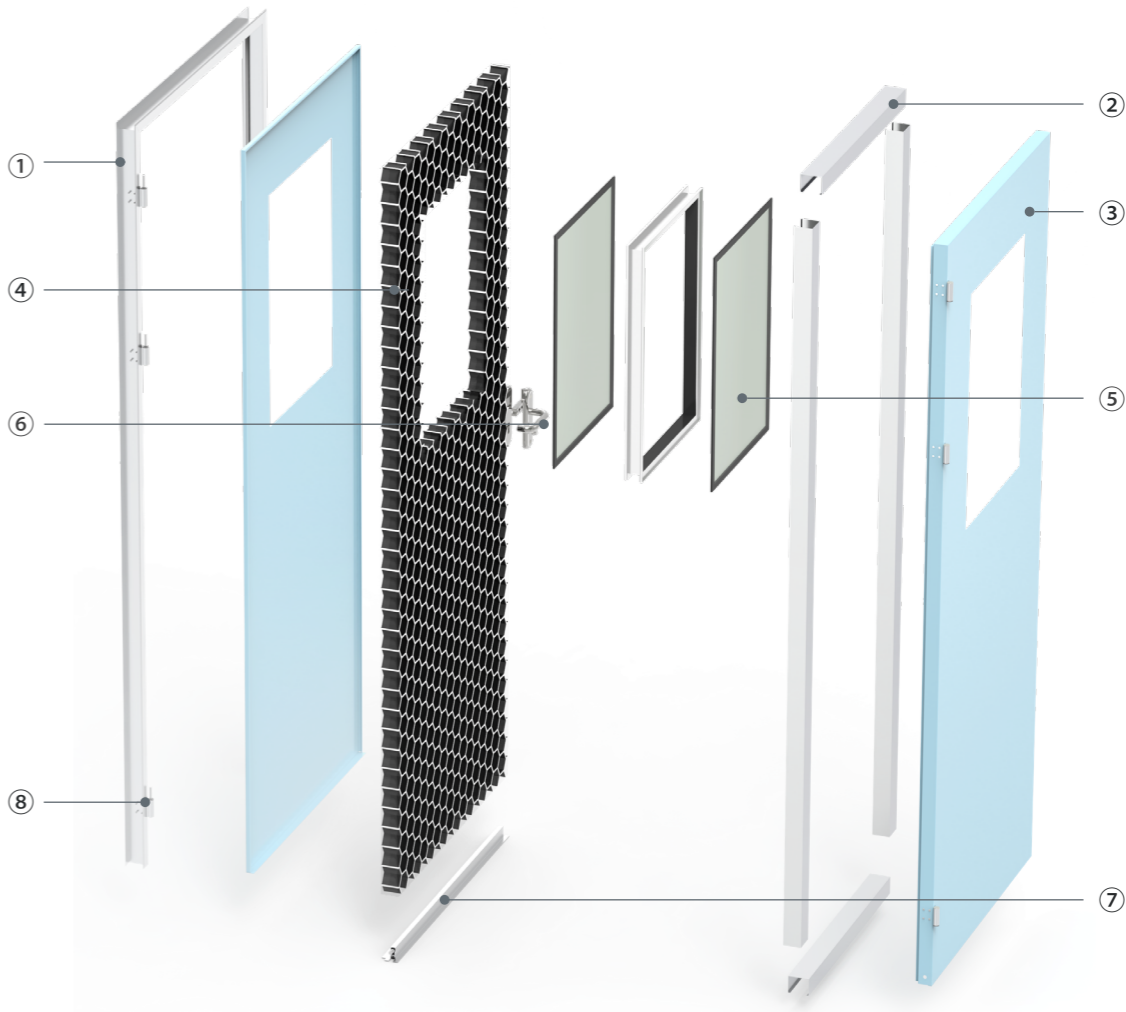

① 门框

采用铝合金型材，平滑过渡设计，防撞伤，易清洁

② 门扇框

采用铝合金边框，表面平整

③ 面板

彩涂板，抗撞，耐磨，抗菌

④ 门扇芯材 采用铝蜂窝，其中心为铝质六边形，蜂窝无可燃物质，阻燃，防水、防潮、无有害气体释放

⑤ 观察窗 采用双层钢化玻璃，窗框和门扇一体复合，不易脱落，无死角，防结雾

⑥ 门锁

防撞、防夹，执手可用手肘开门

⑦ 升降扫地条 采用特有双弹片设计，下沉顺畅，力度平均，静音，气密性好

⑧ 合页 长时间使用不会产生金属粉末，静音，耐磨，易清洁，牢固美观

① Aluminum Door Frame Profile

Aluminium alloy profile, the whole door frame with a smooth transition design,anti-collision, easy to clean.

② Aluminum Door Leaf Profile

Aluminium alloy frame, flat surface

③ Panel

PPGI, Anti-collision, abrasion resistance, antibacterial

④ Core material of door leaf Using aluminum honeycomb, the center of which is aluminum hexagon, the honeycomb has no combustible substances, flame retardant, waterproof, moisture-proof, no harmful gas release

⑤ Observation window

Using double-layer tempered glass, and the window frame and door leaf are integrated.Not easy to fall off, no dead angle, anti-fogging

⑥ Lock

Anticollision, anti-pinch, can be opened by elbow

⑦ Drop seal set


Adopt unique double-shrapnel design, sinking smoothly, average strength, mute, good air tightness

⑧ Hinges

Non-metal powder produced while working, quiet, wear-resistant, easy to clean, firm and beautiful

平开门（40 门扇）

Swing door (door leaf thickness 40mm)

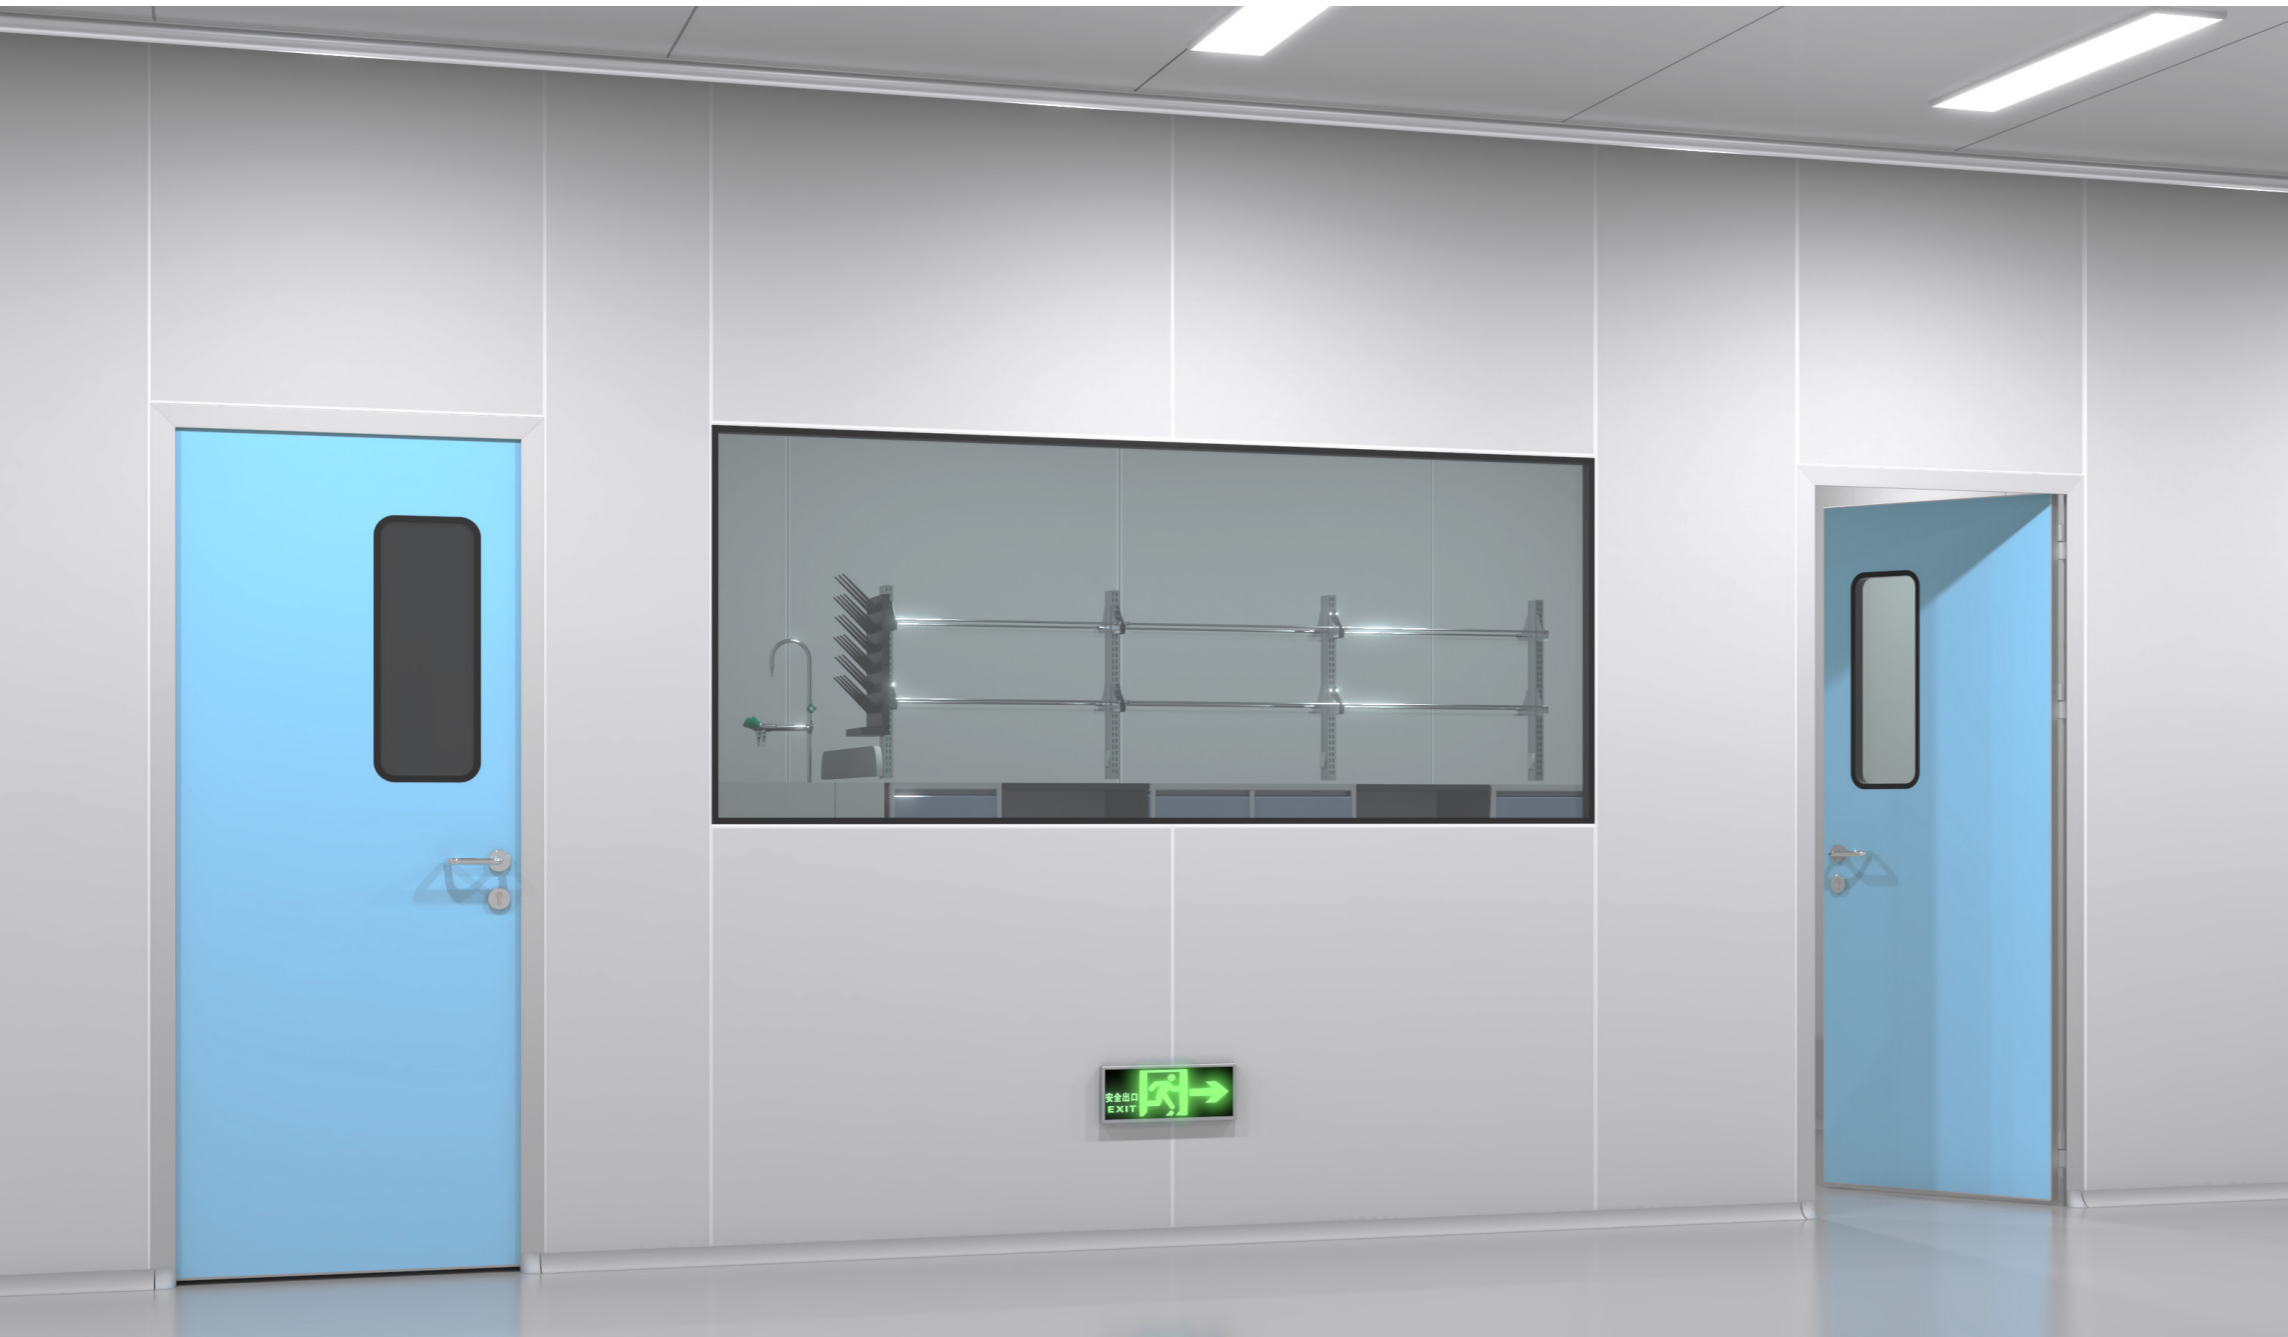

产品特点

- 可选彩涂板，色彩鲜艳，耐磨，耐腐蚀，抗污；抗倍特板食用级别涂层，安全无害
- 采用分体锁，可用手肘开门，防撞，防夹手
- 整扇门边角采用圆弧设计，防撞伤，安全性高
- 安装方便，尺寸灵活，满足客户各种需求


Feature

- Optional colored GI panel, bright color, wear-resistant, corrosion-resistant, anti-fouling; HPL food grade coating, safe and harmless
- Use split lock, can open the door with elbow, anti-collision, anti-hand grip
- The corner of the whole door adopts arc design, which is anti-collision and high safety
- Easy installation and customized size to meet most kinds of your needs



产品细节 Product details



- ① 合页 Hinges
- ② 门扇框 Aluminum Door Leaf Profile
- ③ 门锁 Lock
- ④ 门扇角 Door Leaf corner
- ⑤ 门框角 Door Frame corner
- ⑥ 门扇 Door Leaf



结构示意图 Structure Diagram

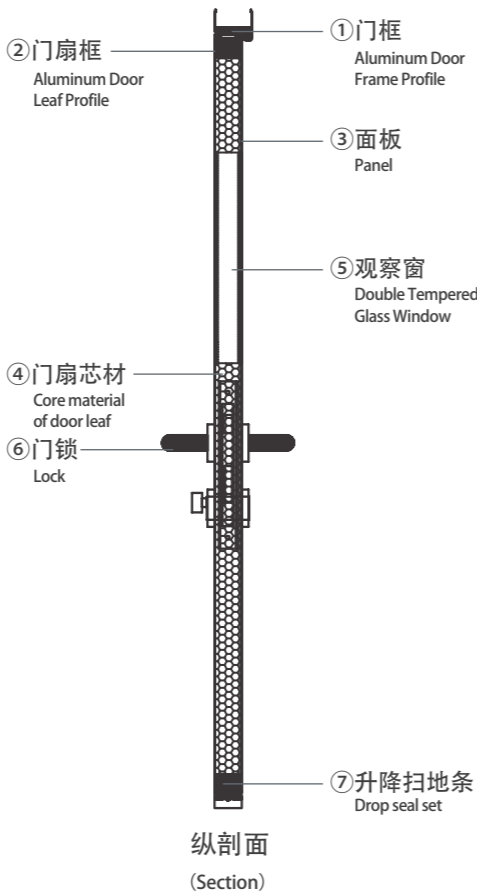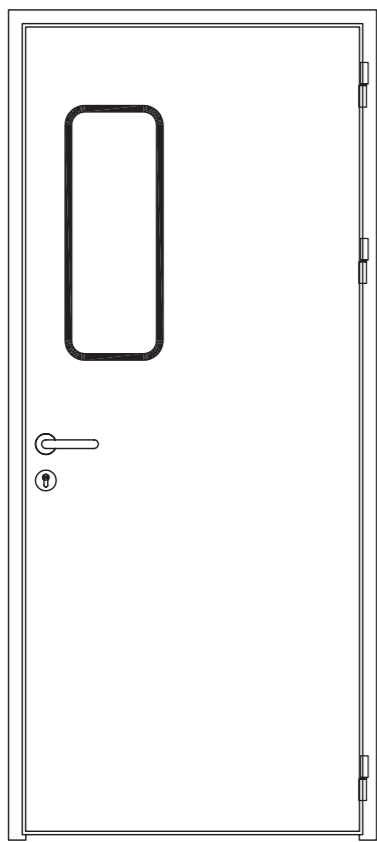

技术参考

门洞常用宽度 (mm)	单开门	子母门	双开门
	800/950	1200/1350	1500/1800
门洞常用高度 (mm)	2100		
门扇可开启宽度	0° ~170°		

类型选项

种类选择	机制板	手工板
墙厚 (mm)	50、75、100	50、75、100
面板类型	彩涂板、不锈钢板、抗倍特板	
门扇厚度 (mm)	40	
观察窗尺寸 (mm)	250×650、450×650、400×600	
锁具类型	执手锁、雅洁锁、分体锁、逃生锁、碰珠锁、不锈钢拉手	
门控类型	明装闭门器、互锁、电动平开门	


Technical reference

Normal width of door hole(mm)	Single door 800/950	Unequal double door 1200/1350	Double door 1500/1800
Normal height of door hole(mm)	2100		
Opening angle	0° ~170°		

Type option

Type	Sandwich panel	Handicraft panel
Wall thickness(mm)	50、75、100	50、75、100
The type of panel	Colored GI panel,SUS panel,HPL	
Door leaf thickness(mm)	40	
Observation window size (mm)	250×650、450×650、400×600	
The type of lock	Handle lock,Globular lock,Split lock,Push type panic bar,Touch the bead lock,SUS handle	
Access Control	Exposed door closers,Interlocking,Electric swing door machine	

产品爆炸图 Assembling Drawings

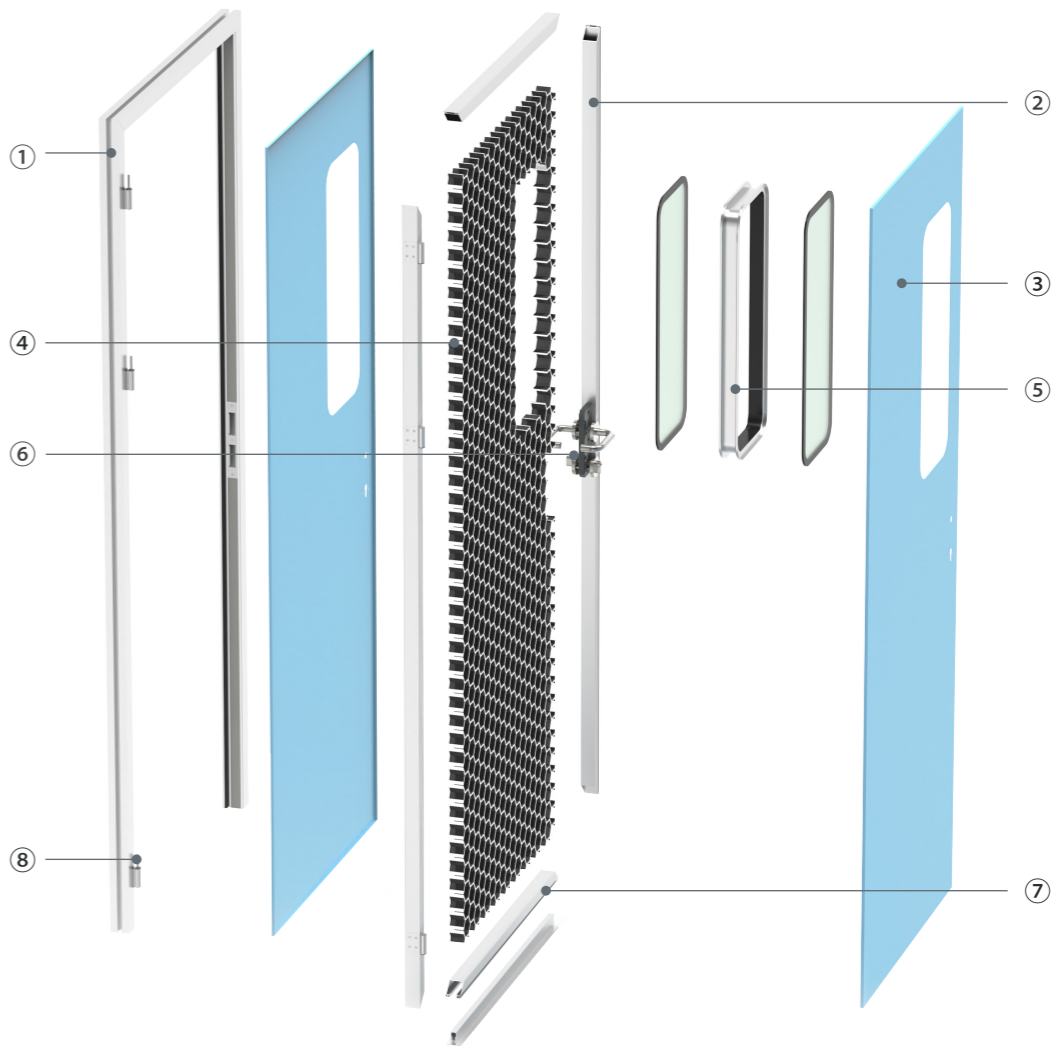

①门框 采用铝合金型材，平滑过渡设计，防撞伤，易清洁	① Aluminum Door Frame Profile Aluminium alloy profile, the whole door frame with a smooth transition design,anti-collision, easy to clean.
②门扇框 采用铝合金边框，表面平整	② Aluminum Door Leaf Profile Aluminium alloy frame, flat surface
③面板 彩涂板或抗倍特板，抗撞，耐磨，抗菌	③ Panel PPGI or HPL,Anti-collision, abrasion resistance, antibacterial
④门扇芯材 采用铝蜂窝，其中心为铝质六边形，蜂窝无可燃物质，阻燃，防水、防潮、无有害气体释放	④ Core material of door leaf Using aluminum honeycomb, the center of which is aluminum hexagon, the honeycomb has no combustible substances, flame retardant, waterproof, moisture-proof, no harmful gas release
⑤观察窗 采用双层钢化玻璃，窗框和门扇一体复合，不易脱落，无死角，防结雾	⑤ Observation window Using double-layer tempered glass, and the window frame and door leaf are integrated.Not easy to fall off, no dead angle, anti-fogging
⑥门锁 门锁采用四周圆角设计，防撞、防夹，执手可用手肘开门	⑥ Lock Round corner design, anticollision, anti-pinch, can be opened by elbow
⑦升降扫地条 采用特有双弹片设计，下沉顺畅，力度平均，静音，气密性好	⑦ Drop seal set Adopt unique double-shrapnel design, sinking smoothly, average strength, mute, good air tightness
⑧合页 长时间使用不会产生金属粉末，静音，耐磨，易清洁，牢固美观	⑧ Hinges Non-metal powder produced while working, quiet, wear-resistant, easy to clean, firm and beautiful

平开门（50 门扇）


Swing door (door leaf thickness 50mm)



产品细节 Product details



- ① 合页 Hinges
- ② 门扇框 Aluminum Door Leaf Profile
- ③ 门锁 Lock
- ④ 门扇角 Door Leaf corner
- ⑤ 门框角 Door Frame corner
- ⑥ 门扇 Door Leaf





产品特点

- 可选彩涂板，色彩鲜艳，耐磨，耐腐蚀，抗污；抗倍特板食用级别涂层，安全无害
- 采用分体锁，可用手肘开门，防撞，防夹手
- 整扇门边角采用圆弧设计，防撞伤，安全性高
- 安装方便，尺寸灵活，满足客户各种需求

Feature

- Optional colored GI panel, bright color, wear-resistant, corrosion-resistant, anti-fouling; HPL food grade coating, safe and harmless
- Use split lock, can open the door with elbow, anti-collision, anti-hand grip
- The corner of the whole door adopts arc design, which is anti-collision and high safety
- Easy installation and customized size to meet most kinds of your needs

结构示意图 Structure Diagram

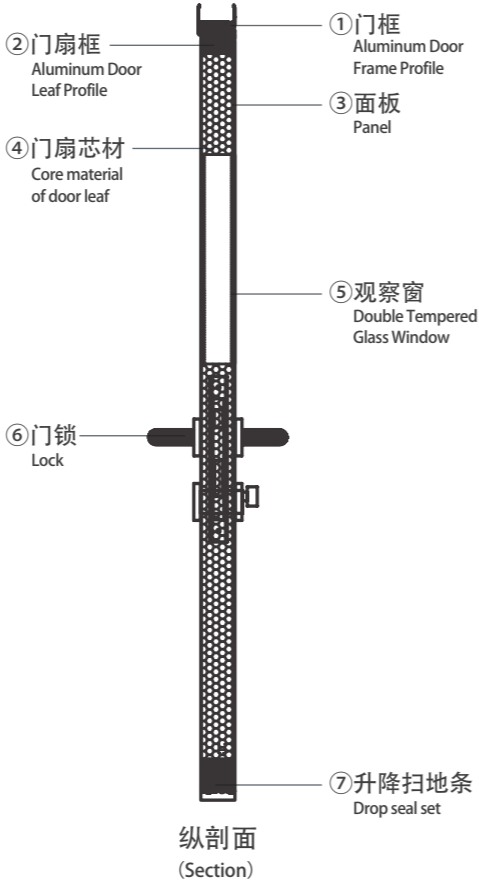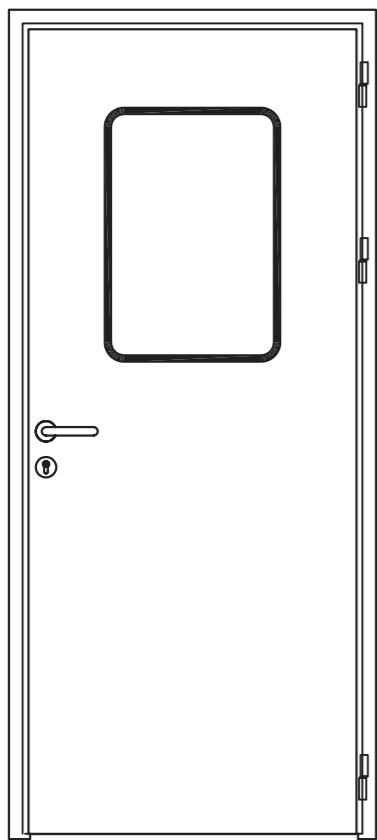

技术参考

门洞常用宽度 (mm)	单开门	子母门	双开门
	800/950	1200/1350	1500/1800
门洞常用高度 (mm)	2100		
门扇可开启宽度	0° ~170°		

类型选项

种类选择	机制板	手工板
墙厚 (mm)	50	50、100
面板类型	彩涂板、不锈钢板、抗倍特板	
门扇厚度 (mm)	50	
观察窗尺寸 (mm)	250×650、450×650、400×600	
锁具类型	执手锁、雅洁锁、分体锁、逃生锁、碰珠锁、不锈钢拉手	
门控类型	明装闭门器、暗装闭门器、互锁、电动平开门机	


Technical reference

Normal width of door hole(mm)	Single door 800/950	Unequal double door 1200/1350	Double door 1500/1800
Normal height of door hole(mm)	2100		
Opening angle	0° ~170°		

Type option

Type	Sandwich panel	Handicraft panel
Wall thickness(mm)	50	50/100
The type of panel	Colored GI panel,SUS panel,HPL	
Door leaf thickness(mm)	50	
Observation window size (mm)	250×650、450×650、400×600	
The type of lock	Handle lock,Globular lock,Split lock,Push type panic bar,Touch the bead lock,SUS handle	
Access Control	Exposed door closers,Hidden door closers, Interlocking,Electric swing door machine	

产品爆炸图 Assembling Drawings

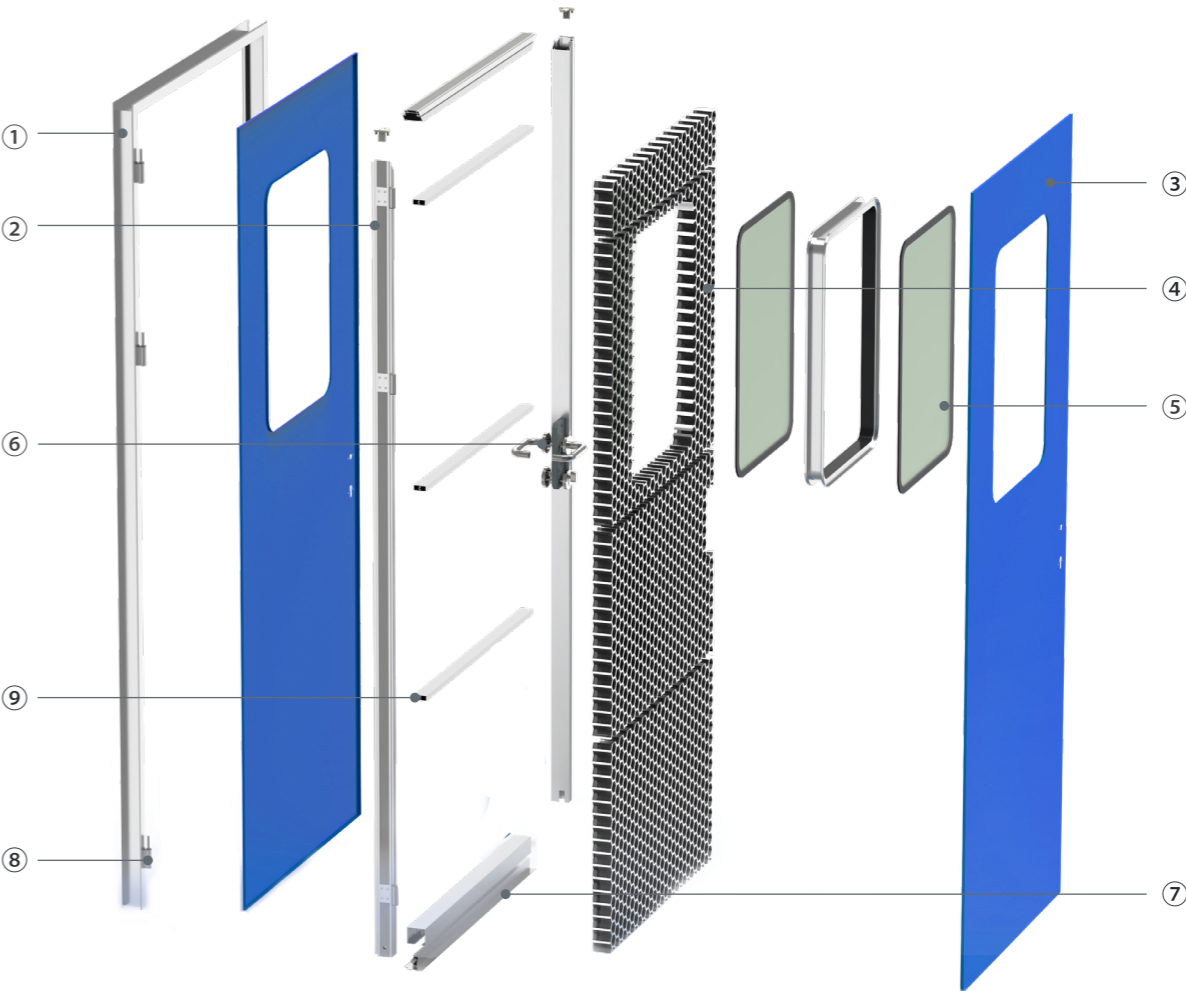

①门框

采用铝合金型材，平滑过渡设计，防撞伤，易清洁

②门扇框

采用铝合金边框，表面平整

③面板

彩涂板或抗倍特板，抗撞，耐磨，抗菌

④门扇芯材 采用铝蜂窝，其中心为铝质六边形，蜂窝无可燃物质，阻燃，防水、防潮、无有害气体释放

⑤观察窗 采用双层钢化玻璃，窗框和门扇一体复合，不易脱落，无死角，防结雾

⑥门锁

门锁采用四周圆角设计，防撞、防夹，可用手肘开门

⑦升降扫地条 采用特有双弹片设计，下沉顺畅，力度平均，静音，气密性好

⑧合页 长时间使用不会产生金属粉末，静音，耐磨，易清洁，牢固美观

⑨加强筋 内置加强筋，减少、降低因外力造成的变形情况，牢固、防撞，更耐用

① Aluminum Door Frame Profile

Aluminium alloy profile, the whole door frame with a smooth transition design,anti-collision, easy to clean.

② Aluminum Door Leaf Profile

Aluminium alloy frame, flat surface

③ Panel

PPGI or HPL,Anti-collision, abrasion resistance, antibacterial

④ Core material of door leaf Using aluminum honeycomb, the center of which is aluminum hexagon, the honeycomb has no combustible substances, flame retardant, waterproof, moisture-proof, no harmful gas release

⑤ Observation window

Using double-layer tempered glass, and the window frame and door leaf are integrated. Not easy to fall off, no dead angle, anti-fogging

⑥ Lock

Round corner design, anticollision, anti-pinch, can be opened by elbow

⑦ Drop seal set

Adopt unique double-shrapnel design, sinking smoothly, average strength, mute, good air tightness

⑧ Hinges

Non-metal powder produced while working, quiet, wear-resistant, easy to clean, firm and beautiful

⑨ Reinforcing Profile

To reduce deformation caused by external force, solid, anticollision, and durable

半玻璃平开门

Half glass swing door




产品特点

- 可选彩涂板，色彩鲜艳，耐磨，耐腐蚀，抗污；抗倍特板食用级别涂层，安全无害
- 采用分体锁，可用手肘开门，防撞，防夹手
- 整扇门边角采用圆弧设计，防撞伤，安全性高
- 安装方便，尺寸灵活，满足客户各种需求

产品细节 Product details





- ① 合页 Hinges
- ② 门框 Door frame
- ③ 门锁 Lock
- ④ 门扇 Door Leaf
- ⑤ 门缝 Door gap
- ⑥ 观察窗角 Observation window angle



Feature

- Optional colored GI panel, bright color, wear-resistant, corrosion-resistant, anti-fouling; HPL food grade coating, safe and harmless
- Use split lock, can open the door with elbow, anti-collision, anti-hand grip
- The corner of the whole door adopts arc design, which is anti-collision and high safety
- Easy installation and customized size to meet most kinds of your needs

结构示意图 Structure Diagram

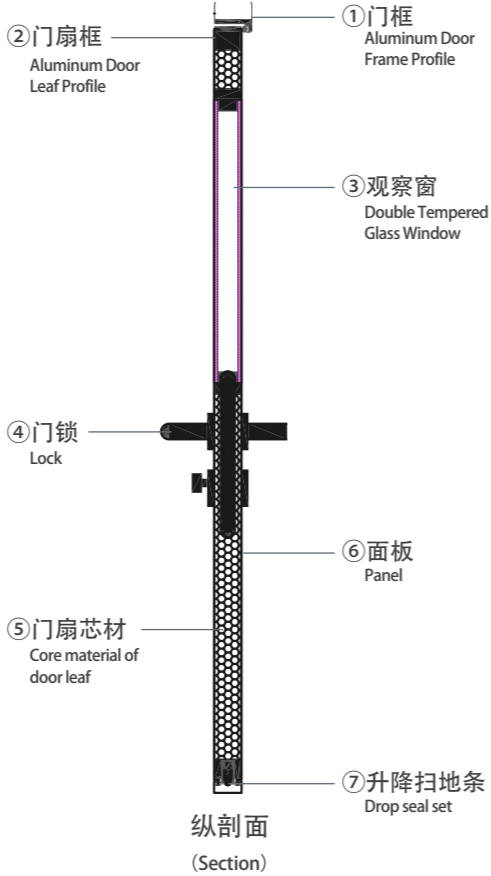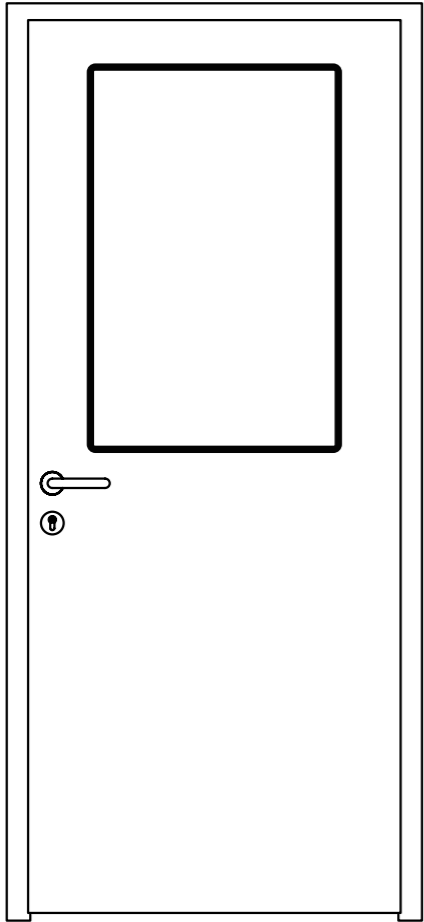

技术参考

门洞常用宽度 (mm)	单开门	子母门	双开门
	800/950	1200/1350	1500/1800
门洞常用高度 (mm)	2100		
门扇可开启宽度	0° ~170°		

类型选项

种类选择	机制板	手工板
墙厚 (mm)	50、100	50、100
面板类型	彩涂板、不锈钢板	
门扇厚度 (mm)	40/50	
锁具类型	执手锁、雅洁锁、分体锁、逃生锁、碰珠锁、不锈钢拉手	
门控类型	明装闭门器、互锁、电动平开门机	


Technical reference

Normal width of door hole(mm)	Single door	Unequal double door	Double door
	800/950	1200/1350	1500/1800
Normal height of door hole(mm)	2100		
Opening angle	0° ~170°		

Type option

Type	Sandwich panel	Handicraft panel
Wall thickness(mm)	50、100	50、100
The type of panel	Colored GI panel,SUS panel	
Door leaf thickness(mm)	40/50	
The type of lock	Handle lock,Globular lock,Split lock,Push type panic bar,Touch the bead lock,SUS handle	
Access Control	Exposed door closers,Interlocking, Electric swing door machine	

产品爆炸图 Assembling Drawings

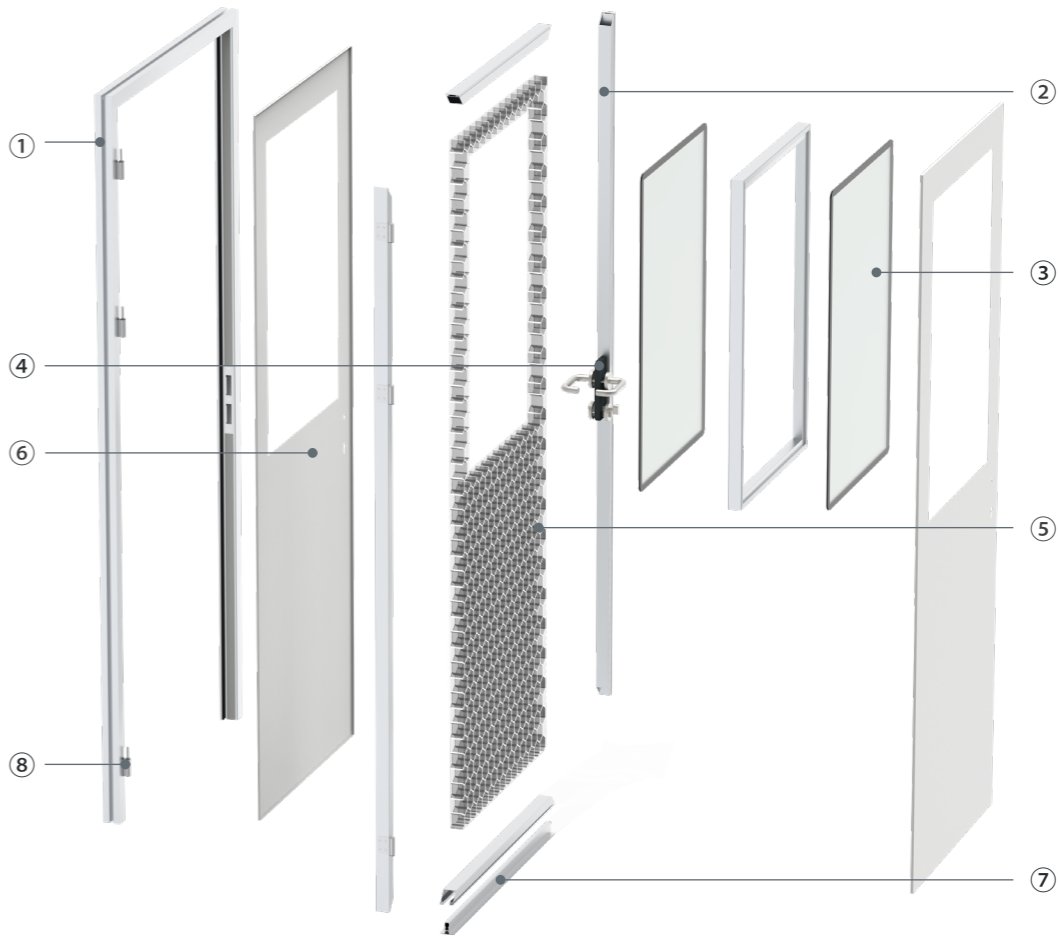

①门框

采用铝合金型材，平滑过渡设计，防撞伤，易清洁

②门扇框

采用铝合金边框，表面平整

③观察窗 采用双层钢化玻璃，窗框和门扇一体复合，不易脱落，无死角，防结雾

④门锁

防撞、防夹，执手可用手肘开门

⑤门扇芯材 采用铝蜂窝，其中心为铝质六边形，蜂窝无可燃物质，阻燃，防水、防潮、无有害气体释放

⑥面板

彩涂板或抗倍特板，抗撞，耐磨，抗菌

⑦升降扫地条 采用特有双弹片设计，下沉顺畅，力度平均，静音，气密性好

⑧合页 长时间使用不会产生金属粉末，静音，耐磨，易清洁，牢固美观

① Aluminum Door Frame Profile

Aluminium alloy profile, the whole door frame with a smooth transition design,anti-collision, easy to clean.

② Aluminum Door Leaf Profile

Aluminium alloy frame, flat surface

③ Observation window

Using double-layer tempered glass, and the window frame and door leaf are integrated. Not easy to fall off, no dead angle, anti-fogging

④ Lock

Anticollision, anti-pinch, can be opened by elbow

⑤ Core material of door leaf Using aluminum honeycomb, the center of which is aluminum hexagon, the honeycomb has no combustible substances, flame retardant, waterproof, moisture-proof, no harmful gas release

⑥ Panel

PPGI or HPL,Anti-collision, abrasion resistance, antibacterial

⑦ Drop seal set

Adopt unique double-shrapnel design, sinking smoothly, average strength, mute, good air tightness

⑧ Hinges

Non-metal powder produced while working, quiet, wear-resistant, easy to clean, firm and beautiful

玻璃平开门


Glass swing door



产品细节 Product details



- ① 合页 Hinges
- ② 门扇框 Aluminum Door Leaf Profile
- ③ 门锁 Lock
- ④ 门扇角 Door Leaf corner
- ⑤ 门缝 Door gap
- ⑥ 面板玻璃 Glass panel





产品特点

- 使用钢化玻璃，当玻璃受外力破坏时，碎片是类似蜂窝的钝角碎小颗粒，不易对人体造成严重的伤害
- 整扇门边角采用圆弧设计，防撞伤，安全性高
- 安装方便，尺寸灵活，满足客户各种需求

Feature

- Use tempered glass. When the glass is damaged by external force, the broken pieces will be into little honeycomb-shape obtuse angle particles, which is not easy to cause serious harm to the human body.
- The corner of the whole door adopts arc design, which is anti-collision and high safety
- Easy installation and customized size to meet most kinds of your needs

结构示意图 Structure Diagram

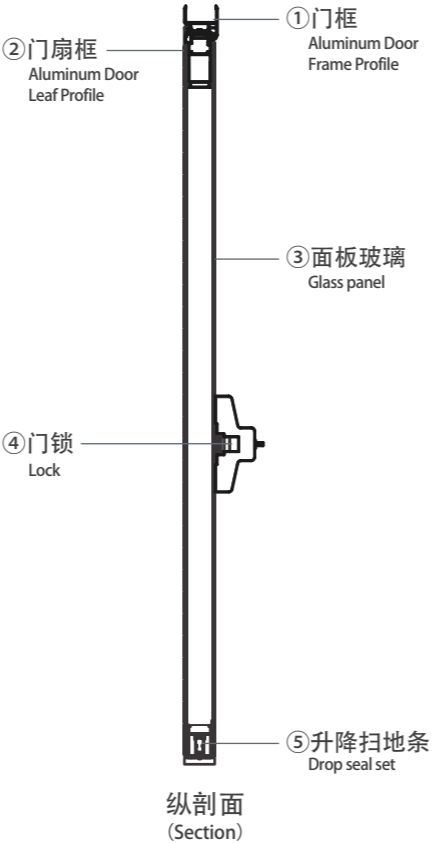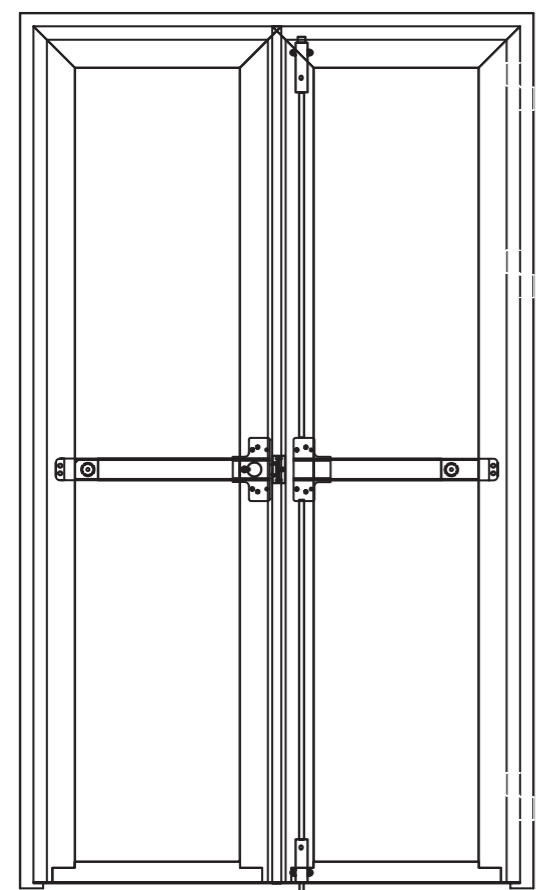

技术参考

门洞常用宽度 (mm)	机制板		手工板	
	单开门	双开门	单开门	双开门
	900	1200,1500	900	1200,1500
门洞常用高度 (mm)	2100			
门扇可开启宽度	0° ~170°			

类型选项

种类选择	机制板	手工板
墙厚 (mm)	50/100	50
面板类型	钢化玻璃 (丝印)	
门扇厚度 (mm)	50	
锁具类型	执手锁、分体锁、逃生锁、碰珠锁、不锈钢拉手	
门控类型	明装闭门器、互锁、电动平开门	


Technical reference

Normal width of door hole(mm)	Sandwich panel		Handicraft panel	
	Single door	Double door	Single door	Double door
	900	1200,1500	900	1200,1500
Normal height of door hole(mm)	2100			
Opening angle	0° ~170°			

Type option

Type	Sandwich panel	Handicraft panel
Wall thickness(mm)	50/100	50
The type of panel	Tempered glass(silk screen)	
Door leaf thickness(mm)	50	
The type of lock	Handle lock,Split lock,Push type panic bar,Touch the bead lock,SUS handle	
Access Control	Exposed door closers,Interlocking,Electric swing door machine	

产品爆炸图 Assembling Drawings

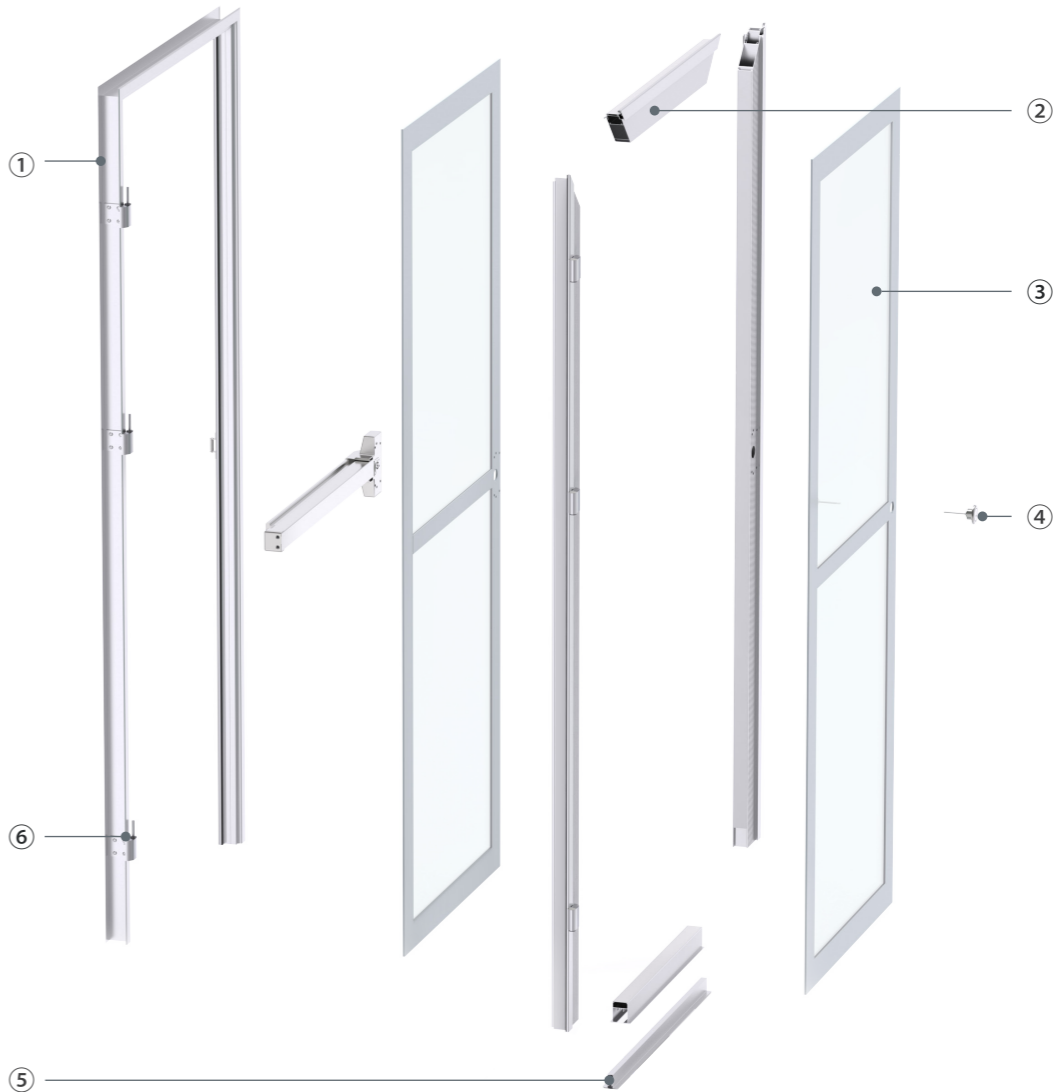

①门框

采用铝合金型材，平滑过渡设计，防撞伤，易清洁

②门扇框

采用铝合金边框，表面平整

③面板玻璃 当玻璃受外力破坏时，碎片会成类似蜂窝状的钝角碎小颗粒，不易对人体造成严重的伤害

④门锁 采用不锈钢系列逃生锁，性能稳定，安全可靠，能够利用人的本能动作将平时关闭的疏散门打开，迅速逃生

⑤升降扫地条 采用特有双弹片设计，下沉顺畅，力度平均，静音，气密性好

⑥合页 长时间使用不会产生金属粉末，静音，耐磨，易清洁，牢固美观

① Aluminum Door Frame Profile

Aluminium alloy profile, the whole door frame with a smooth transition design,anti-collision, easy to clean.

② Aluminum Door Leaf Profile

Aluminium alloy frame, flat surface

③ Glass panel

In case that the glass is broken into pieces, the particles are not shark with shape like honeycomb and won't be harmful seriously to people

④ Lock

Using double-layer tempered glass, and the window frame and door leaf are integrated. Not easy to fall off, no dead angle, anti-fogging

⑤ Drop seal set

Adopt unique double-shrapnel design, sinking smoothly, average strength, mute, good air tightness

⑥ Hinges

Non-metal powder produced while working, quiet, wear-resistant, easy to clean, firm and beautiful

墙体气密平开门

Swing door for brick wall



墙体气密平开门

Swing door for brick wall



墙体气密平开门

Swing door for brick wall



产品特点

- 可选彩涂板，色彩鲜艳，耐磨，耐腐蚀，抗污；抗倍特板食用级别涂层，安全无害
- 在结构上使用圆弧过渡设计，有效防撞击不积尘、易清洁
- 门扇四周安装优质密封条，拥有良好气密性的同时还防夹
- 整扇门边角采用圆弧设计，防撞伤，安全性高


Feature

- Optional colored GI panel, bright color, wear-resistant, corrosion-resistant, anti-fouling; HPL food grade coating, safe and harmless
- The arc transition design is used in the structure to effectively prevent impact, no dust accumulation, and easy to clean
- High-quality sealing strips are installed around the door leaf, which has good air tightness and also prevents pinching
- The corner of the whole door adopts arc design, which is anti-collision and high safety



产品细节 Product details



- ① 合页 Hinges
- ② 门扇框 Aluminum Door Leaf Profile
- ③ 门锁 Lock
- ④ 门扇角 Door Leaf corner
- ⑤ 扫地条 Sweeping strip
- ⑥ 门扇 Door Leaf



结构示意图 Structure Diagram

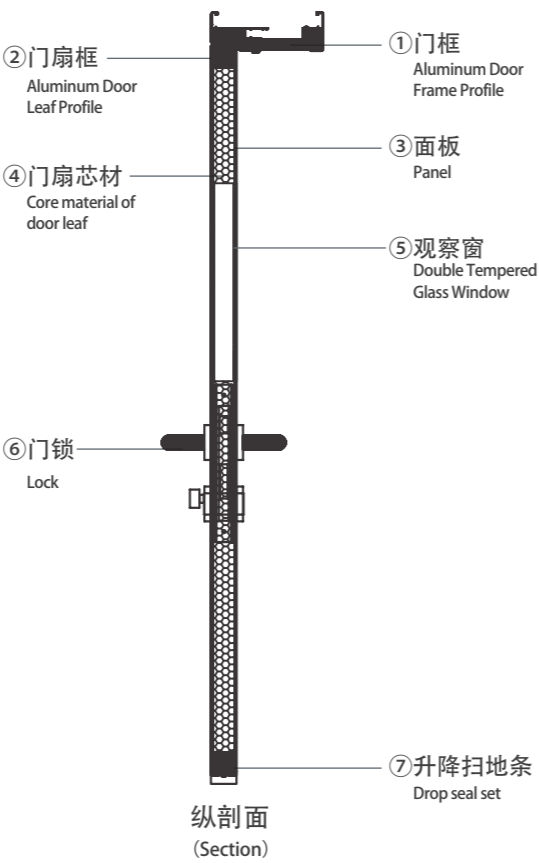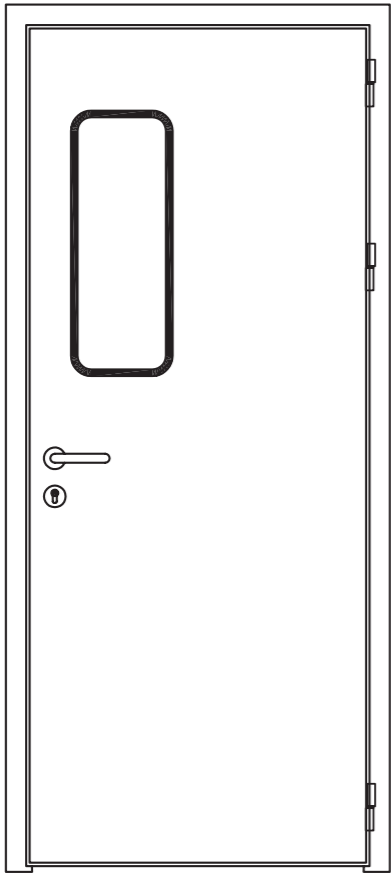

技术参考

门洞常用宽度 (mm)	单开门	子母门	双开门
	800/900/950	1200/1350	1500/1800
门洞常用高度 (mm)	2100		
门扇可开启宽度	0° ~170°		

类型选项

种类选择	墙体门
墙厚 (mm)	≥ 100
面板类型	彩涂板、不锈钢板、抗倍特板
门扇厚度 (mm)	40
观察窗尺寸 (mm)	250×650、450×650、400×600
锁具类型	执手锁、雅洁锁、分体锁、逃生锁、碰珠锁、不锈钢拉手
门控类型	明装闭门器、互锁、电动平开门机


Technical reference

Normal width of door hole(mm)	Single door	Unequal double door	Double door
	800/900/950	1200/1350	1500/1800
Normal height of door hole(mm)	2100		
Opening angle	0° ~170°		

Type option

Type	Wall door
Wall thickness(mm)	≥ 100
The type of panel	Colored GI panel,SUS panel,HPL
Door leaf thickness(mm)	40
Observation window size (mm)	250×650、450×650、400×600
The type of lock	Handle lock,Globular lock,Split lock,Push type panic bar,Touch the bead lock,SUS handle
Access Control	Exposed door closers,Interlocking, Electric swing door machine

产品爆炸图 Assembling Drawings

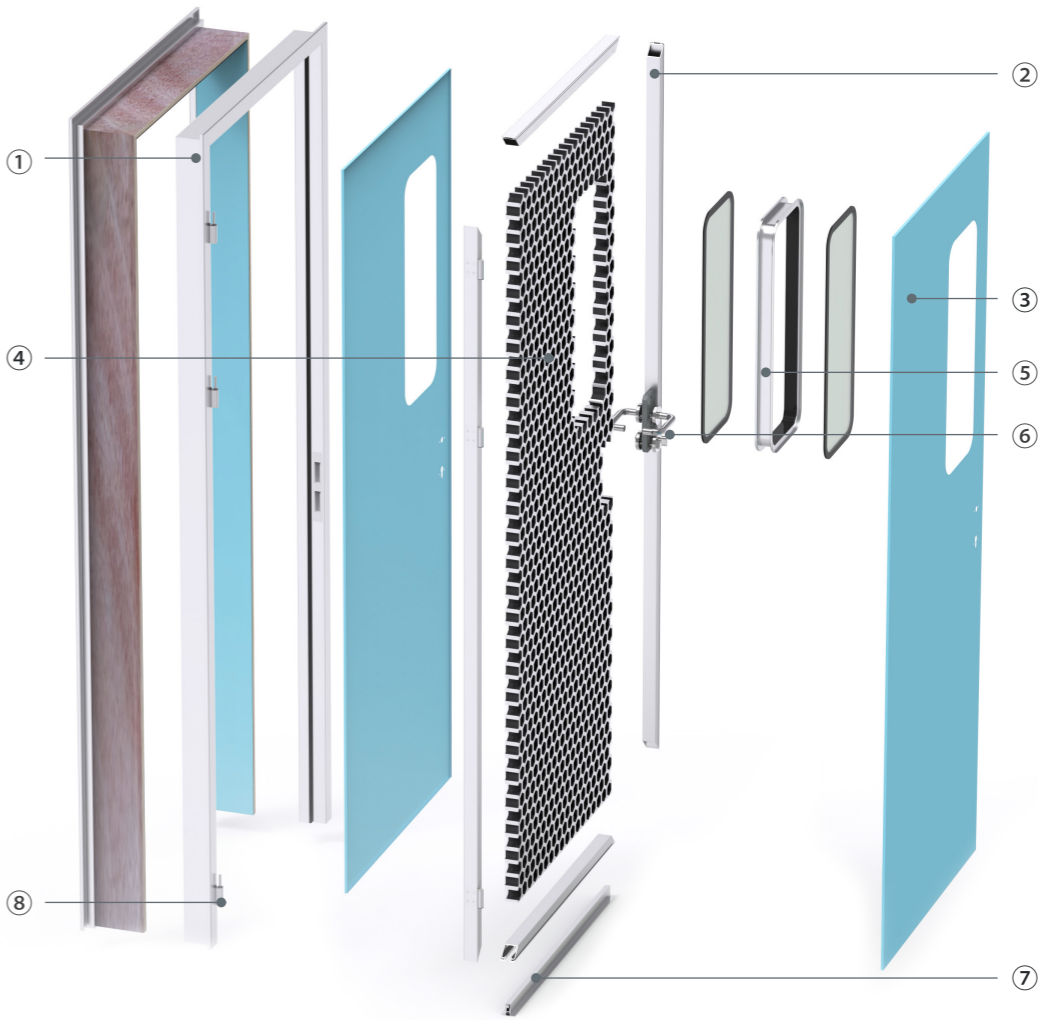

①门框

采用铝合金型材，平滑过渡设计，防撞伤，易清洁

②门扇框

采用铝合金边框，表面平整

③面板

彩涂板或抗倍特板，抗撞，耐磨，抗菌

④门扇芯材 采用铝蜂窝，其中心为铝质六边形，蜂窝无可燃物质，阻燃，防水、防潮、无有害气体释放

⑤观察窗 采用双层钢化玻璃，窗框和门扇一体复合，不易脱落，无死角，防结雾

⑥门锁

防撞、防夹，执手可用手肘开门

⑦升降扫地条 采用特有双弹片设计，下沉顺畅，力度平均，静音，气密性好

⑧合页 长时间使用不会产生金属粉末，静音，耐磨，易清洁，牢固美观

① Aluminum Door Frame Profile

Aluminium alloy profile, the whole door frame with a smooth transition design,anti-collision, easy to clean.

② Aluminum Door Leaf Profile

Aluminium alloy frame, flat surface

③ Panel

PPGI or HPL,Anti-collision, abrasion resistance, antibacterial

④ Core material of door leaf Using aluminum honeycomb, the center of which is aluminum hexagon, the honeycomb has no combustible substances, flame retardant, waterproof, moisture-proof, no harmful gas release

⑤ Observation window

Using double-layer tempered glass, and the window frame and door leaf are integrated. Not easy to fall off, no dead angle, anti-fogging

⑥ Lock

Anticollision, anti-pinch, can be opened by elbow

⑦ Drop seal set

Adopt unique double-shrapnel design, sinking smoothly, average strength, mute, good air tightness

⑧ Hinges

Non-metal powder produced while working, quiet, wear-resistant, easy to clean, firm and beautiful

医用铅防护门

Medical lead protection door



产品特点

- 门扇和内框内衬铅板，防辐射，防撞击
- 铅当量为 2/3mmPa，可遮蔽 X 射线，防止多种有害射线泄露
- 整扇门边角采用圆弧设计，防撞伤，安全性高
- 结构上使用圆弧设计，易清洁，不藏尘


Feature

- The door leaf and inner frame are lined with lead plates to prevent radiation and impact
- The lead equivalent is 2/3mmPa, which can shield X-rays and prevent the leakage of various harmful rays
- The corner of the whole door adopts arc design, which is anti-collision and high safety
- The structure uses arc design, easy to clean, no dust



产品细节 Product details



- ① 合页 Hinges
- ② 门扇框 Aluminum Door Leaf Profile
- ③ 门锁 Lock
- ④ 门扇角 Door Leaf corner
- ⑤ 门框角 Door Frame corner
- ⑥ 门扇 Door Leaf



结构示意图 Structure Diagram

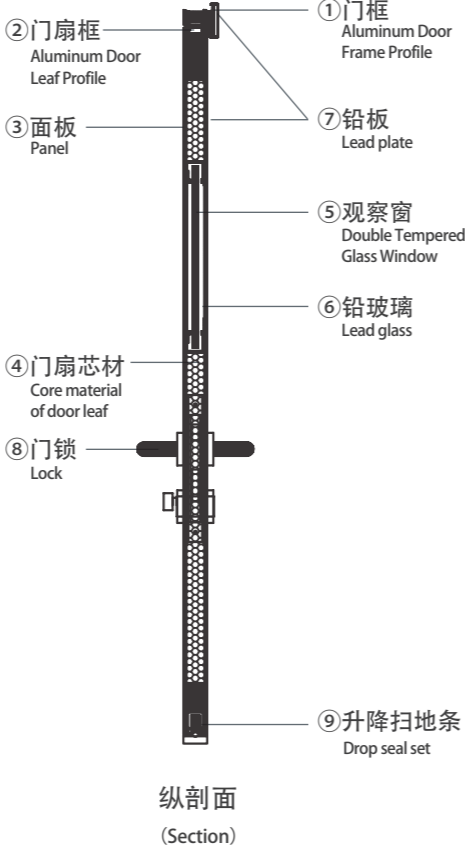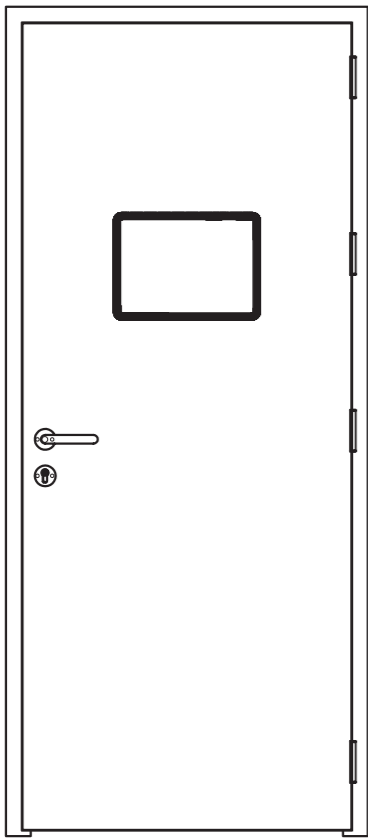

技术参考

门洞常用宽度 (mm)	单开门	双开门
	950/1000	1500
门洞常用高度 (mm)	2100	
门扇可开启宽度	0° ~160°	

类型选项

种类选择	墙体门
墙厚 (mm)	≥ 50
面板类型	彩涂板、抗倍特板 +2/3mmPa 铅当量铅板
门扇厚度 (mm)	40
观察窗尺寸 (mm)	300×400、400×300
锁具类型	分体锁、碰珠锁、不锈钢拉手
门控类型	明装闭门器、互锁


Technical reference

Normal width of door hole(mm)	Single door	Double door
	950/1000	1500
Normal height of door hole(mm)	2100	
Opening angle	0° ~170°	

Type option

Type	Wall door
Wall thickness(mm)	≥ 50
The type of panel	PPGI,HPL+2/3mmPa lead equivalent lead plate
Door leaf thickness(mm)	40
Observation window size (mm)	300×400、400×300
The type of lock	Split lock,Touch the bead lock,SUS handle
Access Control	Exposed door closers,Interlocking

产品爆炸图 Assembling Drawings

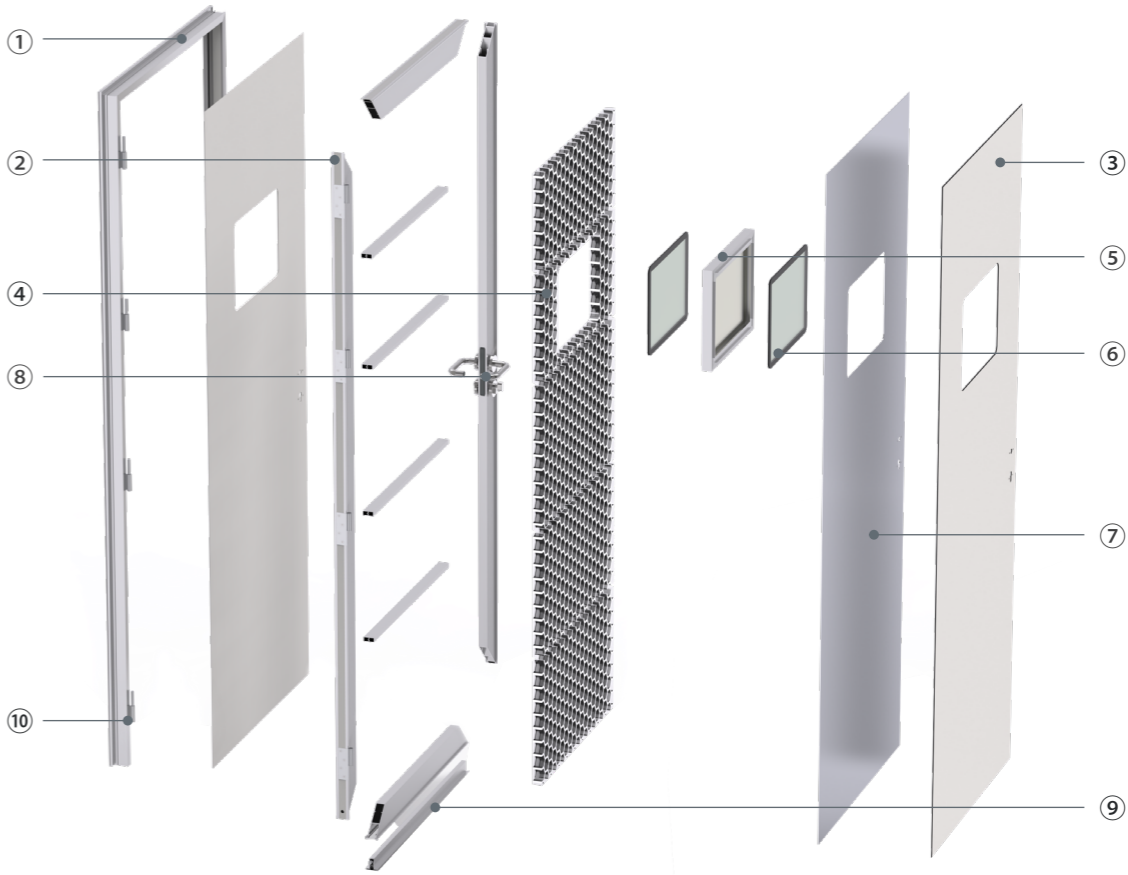

① 门框 采用铝合金型材，平滑过渡设计，防撞伤，易清洁	① Aluminum Door Frame Profile Aluminium alloy profile, the whole door frame with a smooth transition design,anti-collision, easy to clean.
② 门扇框 采用铝合金边框，表面平整	② Aluminum Door Leaf Profile Aluminium alloy frame, flat surface
③ 面板 彩涂板或抗倍特板，抗撞，耐磨，抗菌	③ Panel PPGI or HPL,Anti-collision, abrasion resistance, antibacterial
④ 门扇芯材 采用铝蜂窝，其中心为铝质六边形，蜂窝无可燃物质，阻燃，防水、防潮、无有害气体释放	④ Core material of door leaf Using aluminum honeycomb, the center of which is aluminum hexagon, the honeycomb has no combustible substances, flame retardant, waterproof, moisture-proof, no harmful gas release
⑤ 观察窗 采用双层钢化玻璃，窗框和门扇一体复合，不易脱落，无死角，防结雾	⑤ Observation window Double-layer tempered glass is used, and the window frame and door leaf are integrated. Not easy to fall off, no dead angle, anti-fogging
⑥ 铅玻璃 含有丰富的铅和钡，防辐射	⑥ Lead glass Rich in lead and barium, radiation protection
⑦ 铅板 铅当量为 2/3mmPa，可遮蔽 X 射线，防止多种有害射线泄露对人体造成伤害	⑦ Lead plate Lead equivalent is 2/3mmPb. This design can resist the X-rays, protecting people from harm of many kinds of rays' leakage.
⑧ 门锁 防撞、防夹，执手可用手肘开门	⑧ Lock Anticollision,Anti-pinch,can open by elbow
⑨ 升降扫地条 采用特有双弹片设计，下沉顺畅，力度平均，静音，气密性好	⑨ Drop seal set Adopt unique double-shrapnel design, sinking smoothly, average strength, mute, good air tightness
⑩ 合页 长时间使用不会产生金属粉末，静音，耐磨，易清洁，牢固美观	⑩ Hinges Non-metal powder produced while working, quiet, wear-resistant, easy to clean, firm and beautiful

气密自动门

Airtight automatic door



产品特点

- 导轨采用高强度铝合金制作，门框可开盖，方便维修
- 门框与止摆轮一体化，运行顺畅，气密性好
- 自主研发门扇拉手，与面板平齐无缝无死角，易清洁
- 自动门可配下沉内扣功能，气密性更佳


Feature

- The guide rail is made of high-strength aluminum alloy, and the door frame can be opened for easy maintenance
- The door frame is integrated with the balance wheel, which runs smoothly and has good air tightness
- Independently developed door leaf handle, seamless with the panel without dead angle, easy to clean
- Automatic door can be equipped with sinking inner buckle function, better air tightness


产品细节 Product details



- ① 导轨 Guide Rail
- ② 吊轮 Hanging wheel
- ③ 安全光线 Safe light
- ④ 止摆轮 Balance wheel
- ⑤ 暗装拉手 Hidden handle
- ⑥ 门扇 Door Leaf



结构示意图 Structure Diagram

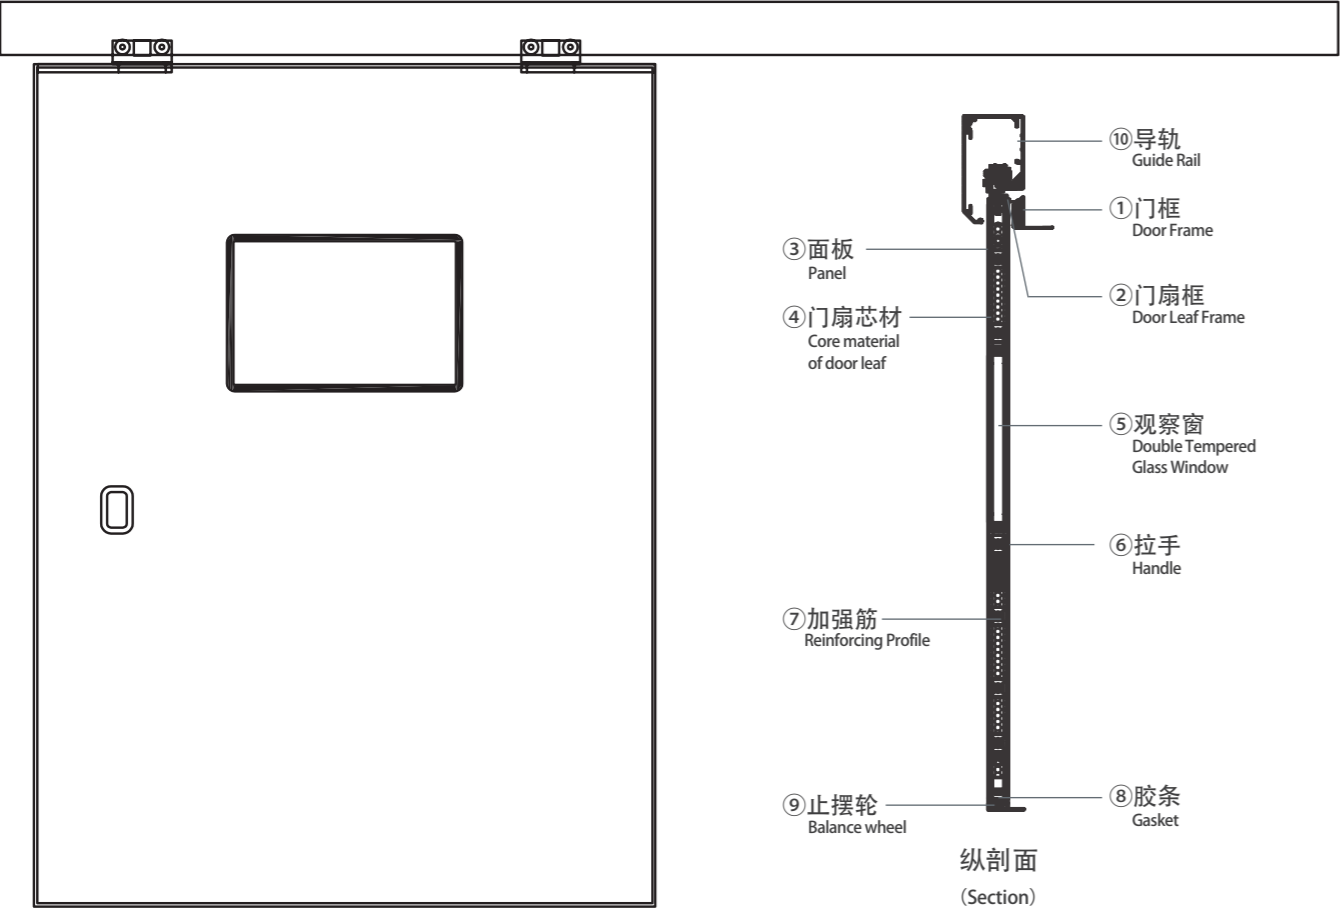

技术参考

门洞常用宽度 (mm)	单开门	双开门
	900/1000/1500	≤ 3000
门洞常用高度 (mm)	≤ 2100	
门扇可开启宽度	≤ 93%	

类型选项

种类选择	墙体门	
墙厚 (mm)	≥ 50	
面板类型	彩涂板、不锈钢板、抗倍特板	
门扇厚度 (mm)	40	
观察窗尺寸 (mm)	抗倍特板	400×600
	彩涂板	450×650
锁具类型	暗装拉手、不锈钢拉手	
门控类型	电动门机系统	


Technical reference

Normal width of door hole(mm)	Single door	Double door
	900/1000/1500	≤ 3000
Normal height of door hole(mm)	2100	
Opening angle	≤ 93%	

Type option

Type	Wall door	
Wall thickness(mm)	≥ 50	
The type of panel	Colored GI panel,SUS panel,HPL	
Door leaf thickness(mm)	40	
Observation window size (mm)	HPL	400×600
	Colored GI pane	450×650
The type of lock	Hidden handle, SUS handle	
Access Control	Electric door system	

产品爆炸图 Assembling Drawings

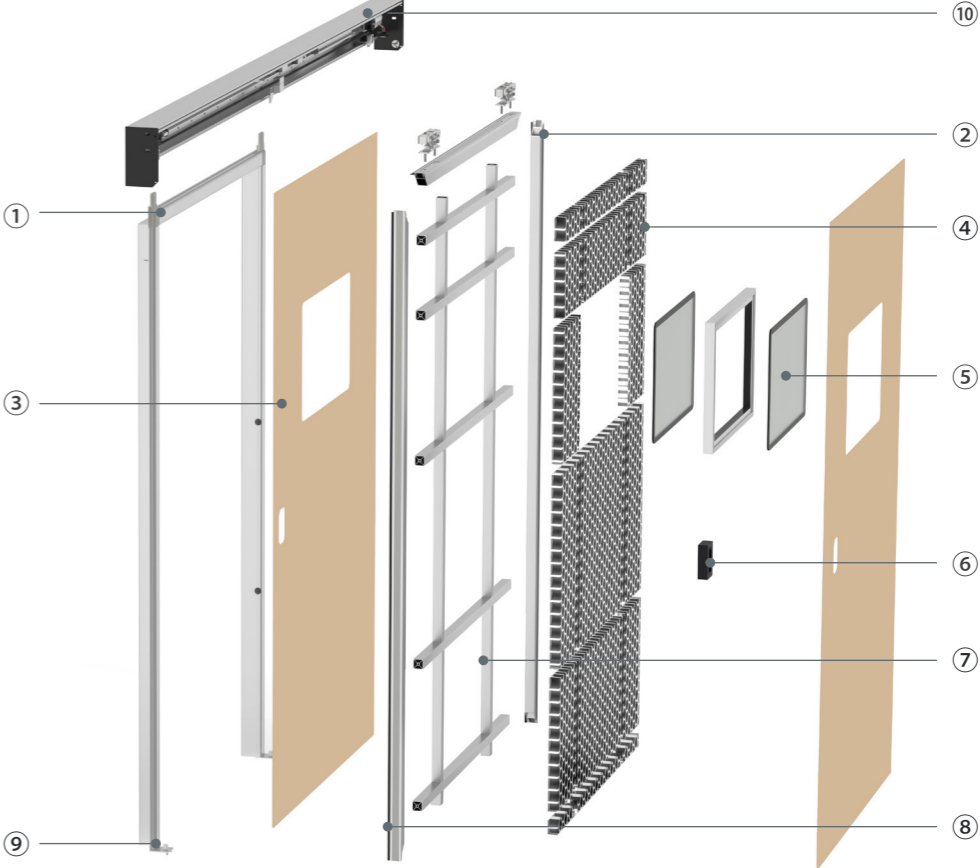

① 门框 采用铝合金型材，平滑过渡设计，防撞伤，易清洁	① Aluminum Door Frame Aluminium alloy profile, the whole door frame with a smooth transition design, anti-collision,easy to clean.
② 门扇框 采用铝合金边框，表面平整	② Aluminum Door Leaf Aluminium alloy frame, flat surface
③ 面板 彩涂板或抗倍特板，抗撞，耐磨，抗菌	③ Panel PPGI or HPL,Anti-collision, abrasion resistance, antibacterial
④ 门扇芯材 采用铝蜂窝，其中心为铝质六边形，蜂窝无可燃物质，阻燃，防水、防潮、无有害气体释放	④ Core material of door leaf Using aluminum honeycomb, the center of which is aluminum hexagon, the honeycomb has no combustible substances, flame retardant, waterproof, moisture-proof, no harmful gas release
⑤ 观察窗 采用双层钢化玻璃，窗框和门扇一体复合，不易脱落，无死角，防结雾	⑤ Observation window Double-layer tempered glass is used, and the window frame and door leaf are integrated. Not easy to fall off, no dead angle, anti-fogging
⑥ 拉手 采用自主开发暗装拉手，整体圆弧过度设计，拉手面与面板平齐无死缝，更容易清洁	⑥ Handle Hidden handle, integral arc over-design, seamless no dead angle, easy to clean
⑦ 加强筋 内置加强筋，减少、降低因外力造成的变形情况，牢固、防撞，更耐用	⑦ Reinforcing Profile To reduce deformation caused by external force, solid, anticollision, and durable
⑧ 胶条 经久耐用，抗寒耐热不易变形，超强耐高温等特点	⑧ Gasket Durable,cold resistant and heat resisting,not easily deformed,thermostability and other characteristics
⑨ 止摆轮 提高安装效率且使得门运行稳定，噪音小	⑨ Balance wheel Improve the installation efficiency and make door operate stably with low noise
⑩ 导轨 采用高强度铝合金制作，表面抛光处理，坚固耐用	⑩ Guide Rail Made of high strength aluminum alloy, surface polishing treatment, stand wear and tear

玻璃气密自动门

Glass airtight automatic door




产品特点

- 导轨采用高强度铝合金制作，门框可开盖，方便维修
- 门框与止摆轮一体化，运行顺畅，气密性好
- 门扇四周镶嵌优质密封胶条，关闭时贴紧门套，拥有良好气密性
- 安装方便，尺寸灵活，满足客户各种需求


Feature

- The guide rail is made of high-strength aluminum alloy, and the door frame can be opened for easy maintenance
- The door frame is integrated with the balance wheel, which runs smoothly and has good air tightness
- The door leaf is inlaid with high-quality sealing strips, which close to the door cover when closed, with good air tightness
- Easy installation and customized size to meet most kinds of your needs


产品细节 Product details

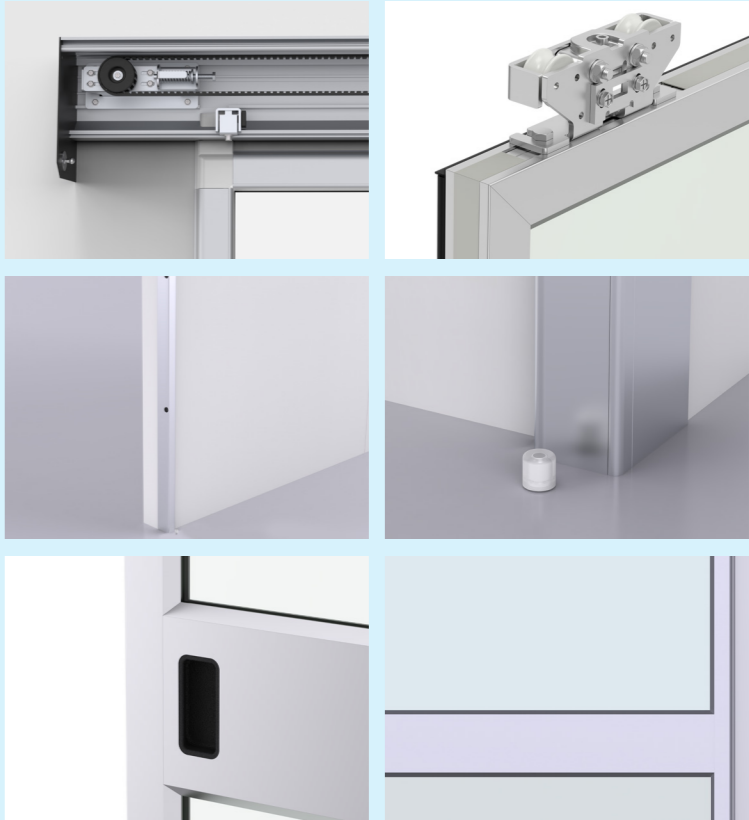

- ① 导轨 Guide
- ② 吊轮 Hanging wheel
- ③ 安全光线 Safe light
- ④ 止摆轮 Balance wheel
- ⑤ 暗装拉手 Hidden handle
- ⑥ 门扇 Door Leaf



结构示意图 Structure Diagram

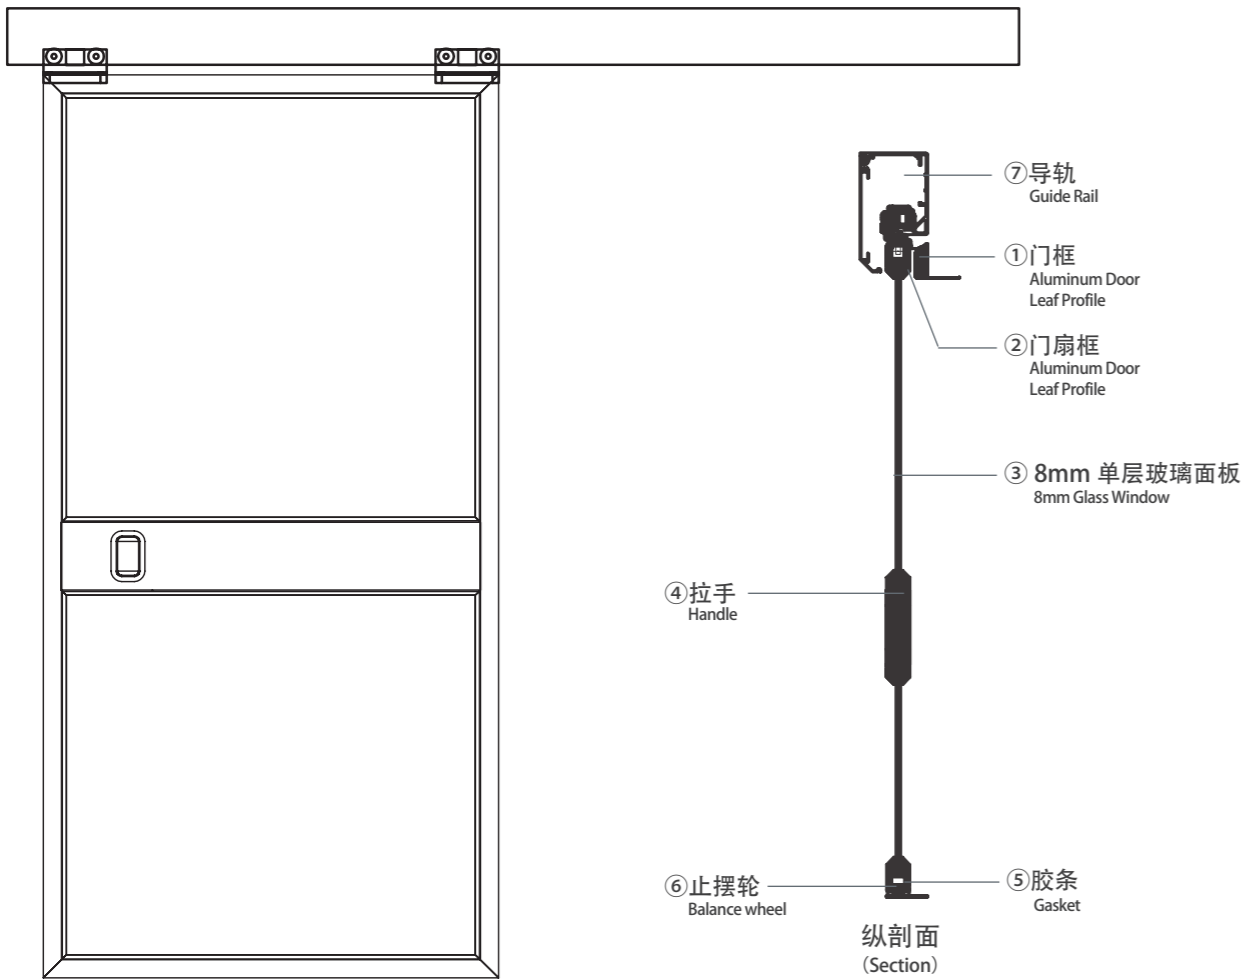

技术参考

门洞常用宽度 (mm)	单开门	双开门
	1000/1200/1500	≤ 3000
门洞常用高度 (mm)	≤ 2100	
门扇可开启宽度	≤ 93%	

类型选项

种类选择	墙体门
墙厚 (mm)	≥ 50
面板类型	钢化玻璃 (8mm)
锁具类型	暗装拉手、不锈钢拉手
门控类型	电动门机系统


Technical reference

Normal width of door hole(mm)	Single door	Double door
	1000/1200/1500	≤ 3000
Normal height of door hole(mm)	≤ 2100	
Opening angle	≤ 93%	

Type option

Type	Wall door
Wall thickness(mm)	≥ 50
The type of panel	Tempered glass(8mm)
The type of lock	Hidden handle, SUS handle
Access Control	Electric door system

产品爆炸图 Assembling Drawings

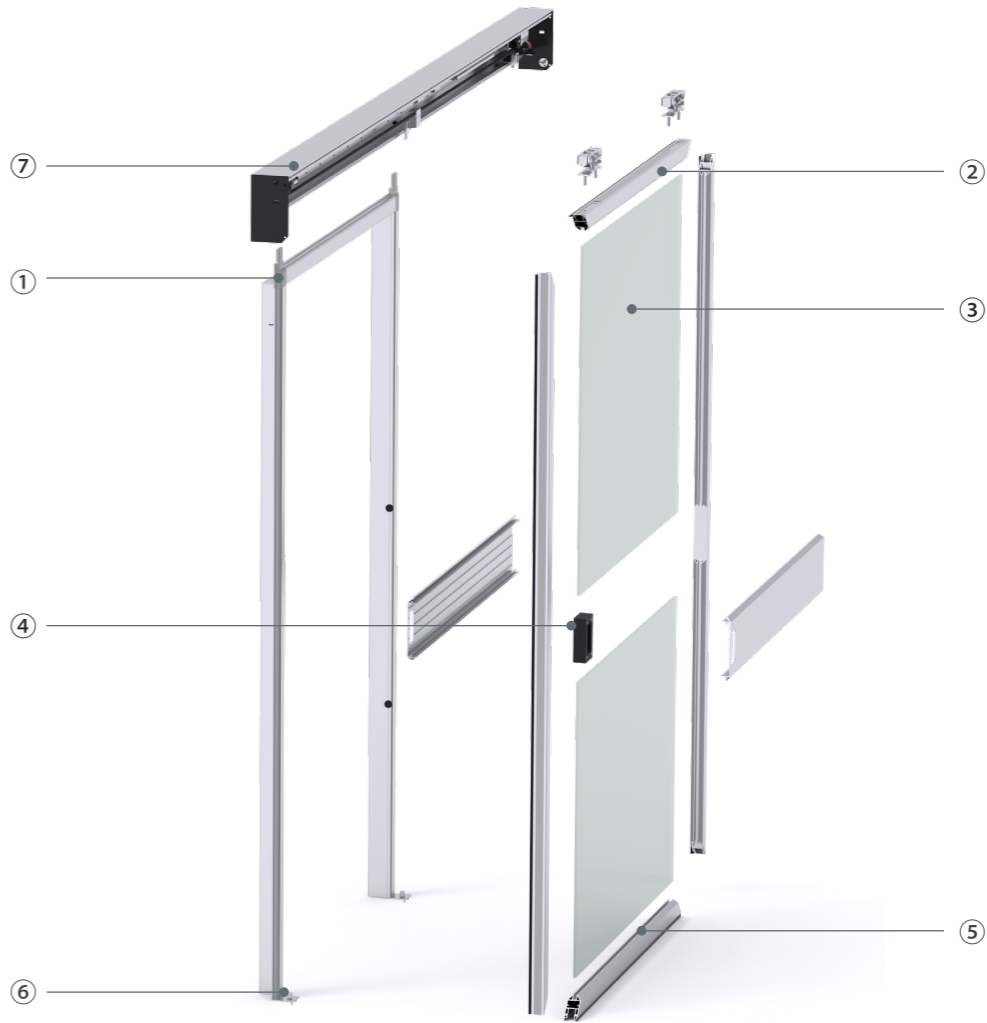

①门框 采用铝合金型材，平滑过渡设计，防撞伤，易清洁	① Aluminum Door Frame Profile Aluminium alloy profile, the whole door frame with a smooth transition design, anti-collision,easy to clean.
②门扇框 采用铝合金边框，表面平整	② Aluminum Door Leaf Profile Aluminium alloy frame, flat surface
③ 8mm 单层玻璃面板 观察清楚，视野广，玻璃与铝材料拼无死角，一体美观更易于清洁。	③ 8mm Glass Window Panel flush with no dead ends, shockproof, the overall appearance easier to clean
④拉手 采用自主开发暗装拉手，整体圆弧过渡设计，拉手面与面板平齐无缝无死角，更易于清洁。	④ Handle Hidden handle, integral arc over-design, seamless no dead angle, easy to clean, firm and beautiful, maximize door hole opening.
⑤胶条 经久耐用，抗寒耐热不易变形，超强耐高温等特点	⑤ Gasket Durable,cold resistant and heat resisting,not easily deformed,thermostability and other characteristics
⑥止摆轮 提高安装效率且使得门运行稳定，噪音小	⑥ Balance wheel Improve the installation efficiency and make door operate stably with low noise
⑦导轨 采用高强度铝合金制作，表面抛光处理，坚固耐用	⑦ Guide Rail Made of high strength aluminum alloy, surface polishing treatment, stand wear and tear
⑧盖板 采用铝合金型材，可向上翻固定，方便维修	⑧ Cover Made of aluminium alloy profile, can be fixed upwards for easy maintenance

双层中空玻璃窗


Double insulating glass window



产品特点 Feature


- 玻璃夹层经过特殊处理，温差不起雾，无菌斑
- 采用洁净级的铝合金框架，坚硬牢固，容易清洁
- 采用钢化玻璃，破碎时，碎片成钝角颗粒，减少人体受伤风险
- The glass interlayer is specially treated to prevent fogging and sterile spots
- Adopt clean aluminum alloy frame, hard and firm, easy to clean
- Using toughened glass, when broken, the fragments become obtuse angle particles, reducing the risk of human injury

产品细节 Product details

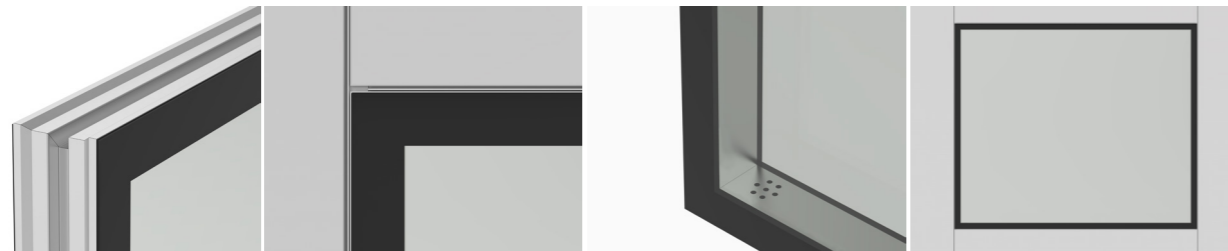

① 窗框角 (Window frame corner) ② 窗框角 (Window frame corner) ③ 充气孔 (Inflatable hole) ④ 整体 (overall)

产品爆炸图 Assembling Drawings

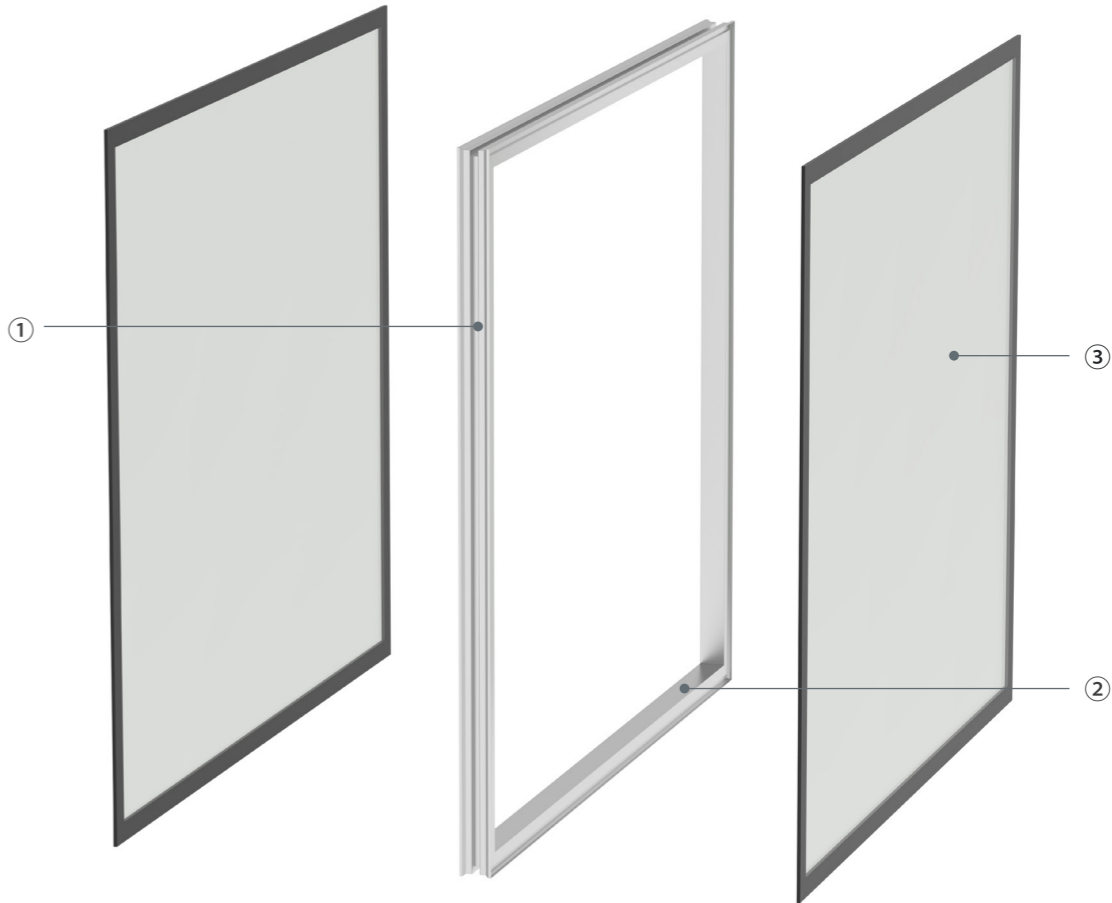

① 铝合金框架 净级铝合金框架，平滑过渡设计，防撞伤，易清洁	① Aluminum Door Frame Profile Aluminium alloy profile, the whole door frame with a smooth transition design, anti-collision, easy to clean.
② PVC 压盖 PVC 压盖下面有个干燥剂，干燥剂在中空玻璃夹层内吸附水蒸气，可防止玻璃因室内与室外存在温差时结雾	② PVC cover By adsorbing water vapor, the desiccant which put under the cover can prevent the mist produced on the glass from the different temperature between the indoor and outdoor.
③ 钢化白玻璃 当玻璃受外力破坏时，碎片会成类似蜂窝状的钝角碎小颗粒，不易对人体造成严重的伤害。强度是普通玻璃的 3 ~ 5 倍	③ Tempered glass When the glass is damaged by external force, it will be broken into honeycomb-shaped obtuse angles small particles, which not easy to cause harm to the human body. The strength of glass is 3 or 5 times than common glass.

送风天花

Air ceiling




产品特点 Feature

- 产品设计符合国内外送风天花 I 级、II 级、III 级设计标准
- 采用标准连接件可拆分拼接组装，方便拆分运输，现场组装
- 气密性高，有效阻挡外面空气、细菌，箱内气流更稳定，干净
- 芯材采用 PU 聚胺脂，保温性能强
- 送风稳定，出风面积达 99%，符合 GMP 设计
- The product design meets the design standards of class I , class II and class III
- It can be split and assembled by using standard connectors, which is convenient for split transportation and on-site assembly
- High air tightness, effectively blocking the outside air and bacteria, the air flow in the box is more stable and clean
- The core material adopts PU polyurethane, which has strong thermal insulation performance
- The air supply is stable, and the area of the air outlet reaches 99%, which meets the GMP design

产品细节 Product details




① 吊杆 (Hanger rod)



② 框架 (Frame)




③ 吊顶 (Suspended ceiling)

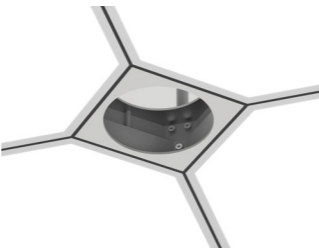

④ 加强吊臂孔 (Hanger hole)

产品爆炸图 Assembling Drawings

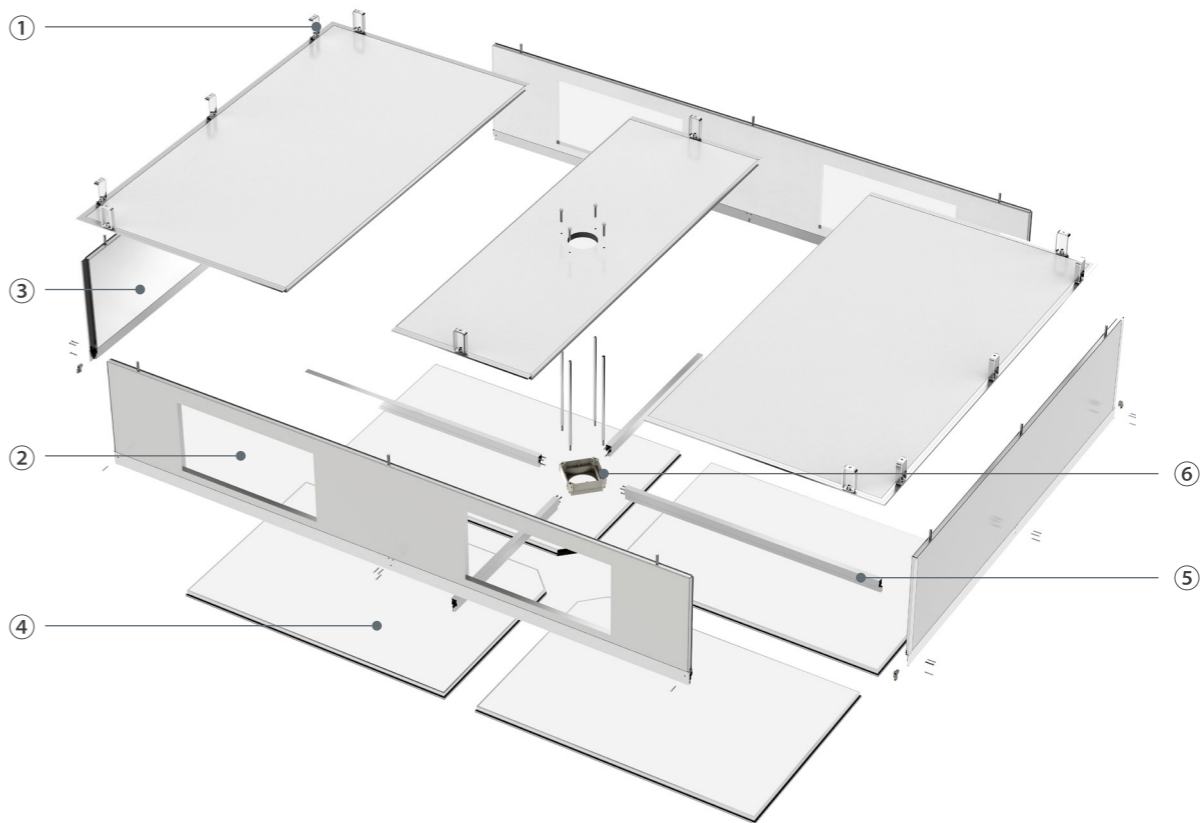


①吊杆 采用铝合金吊杆组装而成，坚硬牢固，不易脱落	① Hanger rod Made by aluminum alloy, firm and strong, not easy to fall off
②送风入口 整体气密性高，有效阻挡外面空气、细菌，使箱体内气流更稳定，干净	② Air-outlet entrance Good air tightness, can stop air and bacterial outside, which makes the inside air flow more clean and steady.
③侧板 面板采用彩涂板或不锈钢板，强度高、抗污等优点。芯材采用 PU 聚胺脂，有效保温，不用做二次保温，轻便强度高	③ Panel With the material of stainless steel or color steel plate, it's high strength and stain resistant. The material of core made by PU polyurethane, which is effective in keeping warm, portable but high strength.
④均流膜 采用卡扣安装，拆卸方便，丝网采用 200 目进口高张力网布，结实耐用，外形美观	④ Membrane Install by block buttons, easy disassembly. Silkscreen made by 200 meshes high tension net cloth, which is strong, durable and good-looking
⑤框架 送风面采用平滑过渡设计，并且整体采用铝合金框架组装而成，相对传统的喷涂钢制框架，更牢固美观耐用，易清洁	⑤ Frame Assembling by aluminum alloy , it's surface is smooth,and it is more beautiful, durable and easier cleaning than traditional steel frame
⑥加强吊臂孔 吊臂孔内使用一次成形配件，强度高，尺寸符合标准，适合各种吊臂设备安装	⑥ Hanger hole Once-forming hole used in the hole, high strength, the size is standard, fit for all kinds of installation of hanger device

医疗设备带 SB007


Medical Bed Head Unit SB007



安装分析 Installation Diagram

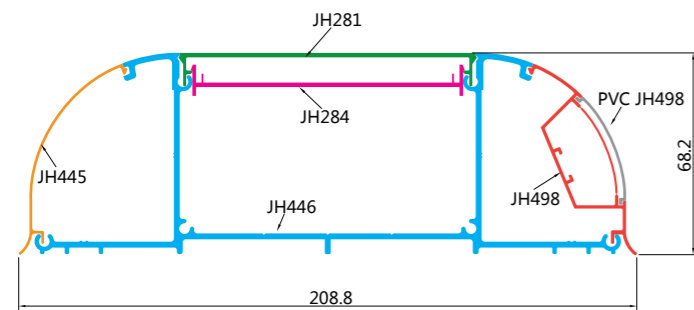

产品细节 Product details

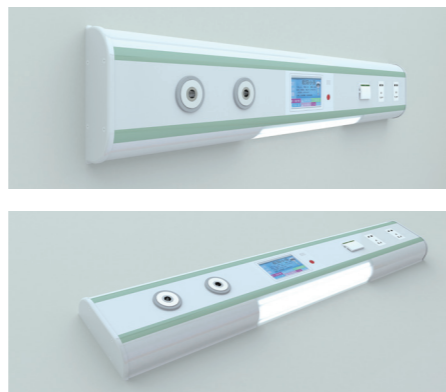

产品特点 Feature


- 采用高强度铝合金材质，表面处理可根据需求定制（静电喷涂、电泳、氧化喷沙）
- 可选配电源插座、照明灯、呼叫、对讲、气体终端等，根据需求预留安装孔
- 外观美观大方，耐磨，容易清洁
- 气体与强、弱电路双通道分隔设置，安全可靠
- 设备带面板侧面板可根据需求定制颜色
- It made of high quality aluminum alloy material, surface finish is customized (powder coating, electrophoresis, anodized)
- It can select the power outlet, flash light, call, intercom, gas terminal, etc. It can make the installation holes according to customers' requirement.
- Beautiful appearance, Wear-resistant, easy to clean
- Gas and strong and weak circuits are separated by dual channels, safe and reliable
- The color of panel and side panel is customized

医疗设备带 SB008


Medical Bed Head Unit SB008



安装分析 Installation Diagram

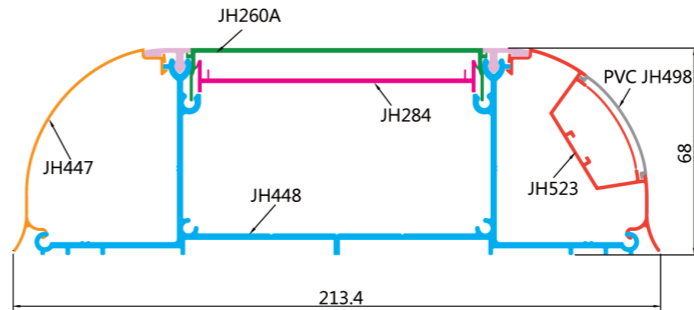

产品细节 Product details

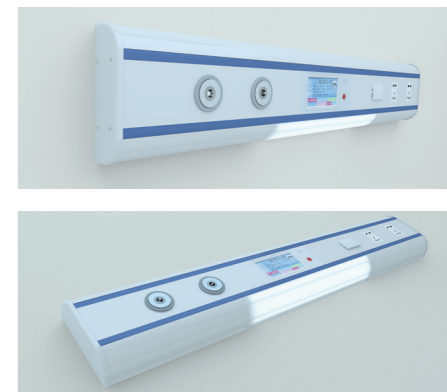

产品特点 Feature


- 采用高强度铝合金材质，表面处理可根据需求定制（静电喷涂、电泳、氧化喷沙）
- 可选配电源插座、照明灯、呼叫、对讲、气体终端等，根据需求预留安装孔
- 外观美观大方，耐磨，容易清洁
- 气体与强、弱电路双通道分隔设置，安全可靠
- 设备带面板侧面板可根据需求定制颜色
- It made of high quality aluminum alloy material, surface finish is customized (powder coating, electrophoresis, anodized)
- It can select the power outlet, flash light, call, intercom, gas terminal, etc. It can make the installation holes according to customers' requirement.
- Beautiful appearance, Wear-resistant, easy to clean
- Gas and strong and weak circuits are separated by dual channels, safe and reliable
- The color of panel and side panel is customized

医疗设备带 SB010

Medical Bed Head Unit SB010



安装分析 Installation Diagram

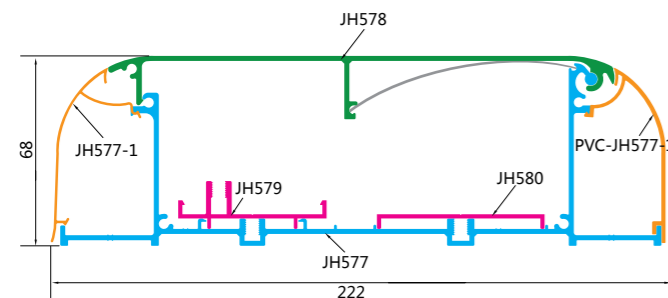

产品细节 Product details



产品特点 Feature


- 采用高强度铝合金材质，表面处理可根据需求定制（静电喷涂、电泳、氧化喷沙）
- 可选配电源插座、照明灯、呼叫、对讲、气体终端等，根据需求预留安装孔
- 外观美观大方，耐磨，容易清洁
- 气体与强、弱电路双通道分隔设置，安全可靠
- 设备带面板侧面板可根据需求定制颜色
- It made of high quality aluminum alloy material, surface finish is customized (powder coating, electrophoresis, anodized)
- It can select the power outlet, flash light, call, intercom, gas terminal, etc. It can make the installation holes according to customers' requirement.
- Beautiful appearance, Wear-resistant, easy to clean
- Gas and strong and weak circuits are separated by dual channels, safe and reliable
- The color of panel and side panel is customized

医疗设备带 SB013


Medical Bed Head Unit SB013



安装分析 Installation Diagram

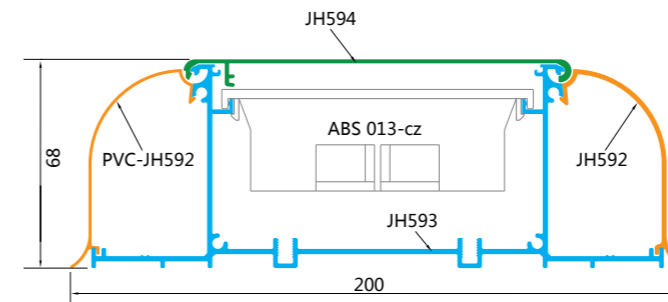

产品细节 Product details

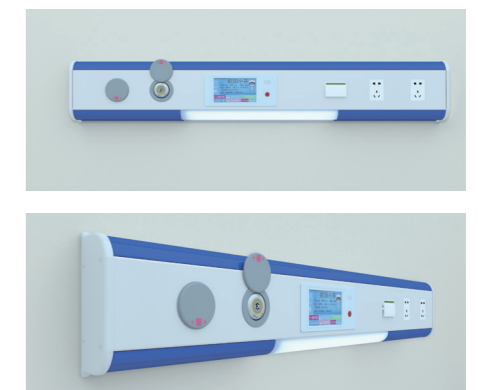

产品特点 Feature

- 采用高强度铝合金材质，表面处理可根据需求定制（静电喷涂、电泳、氧化喷沙）
- 可选配电源插座、照明灯、呼叫、对讲、气体终端等，根据需求预留安装孔
- 外观美观大方，耐磨，容易清洁
- 气体与强、弱电路双通道分隔设置，安全可靠
- 设备带面板侧面板可根据需求定制颜色
- It made of high quality aluminum alloy material, surface finish is customized (powder coating, electrophoresis, anodized)
- It can select the power outlet, flash light, call, intercom, gas terminal, etc. It can make the installation holes according to customers' requirement.
- Beautiful appearance, Wear-resistant, easy to clean
- Gas and strong and weak circuits are separated by dual channels, safe and reliable
- The color of panel and side panel is customized

推荐色板

Recommended color plate

彩涂板系类 Colored GI panel series



希腊天蓝 (Greek sky blue)

湖蓝 (Lake Blue)

北欧蓝 (Nordic Blue)



肤色 (Colour of skin)

果绿 (light green)

灰白 (Gray)


抗倍特板系列 HPL series



晴空宝蓝 -8871 (Royal blue)

金莲花 -8210 (Orange)


水晶绿 -2966 (Crystal green)



荷花白 -0932 (Lotus white)

门型图

Door type

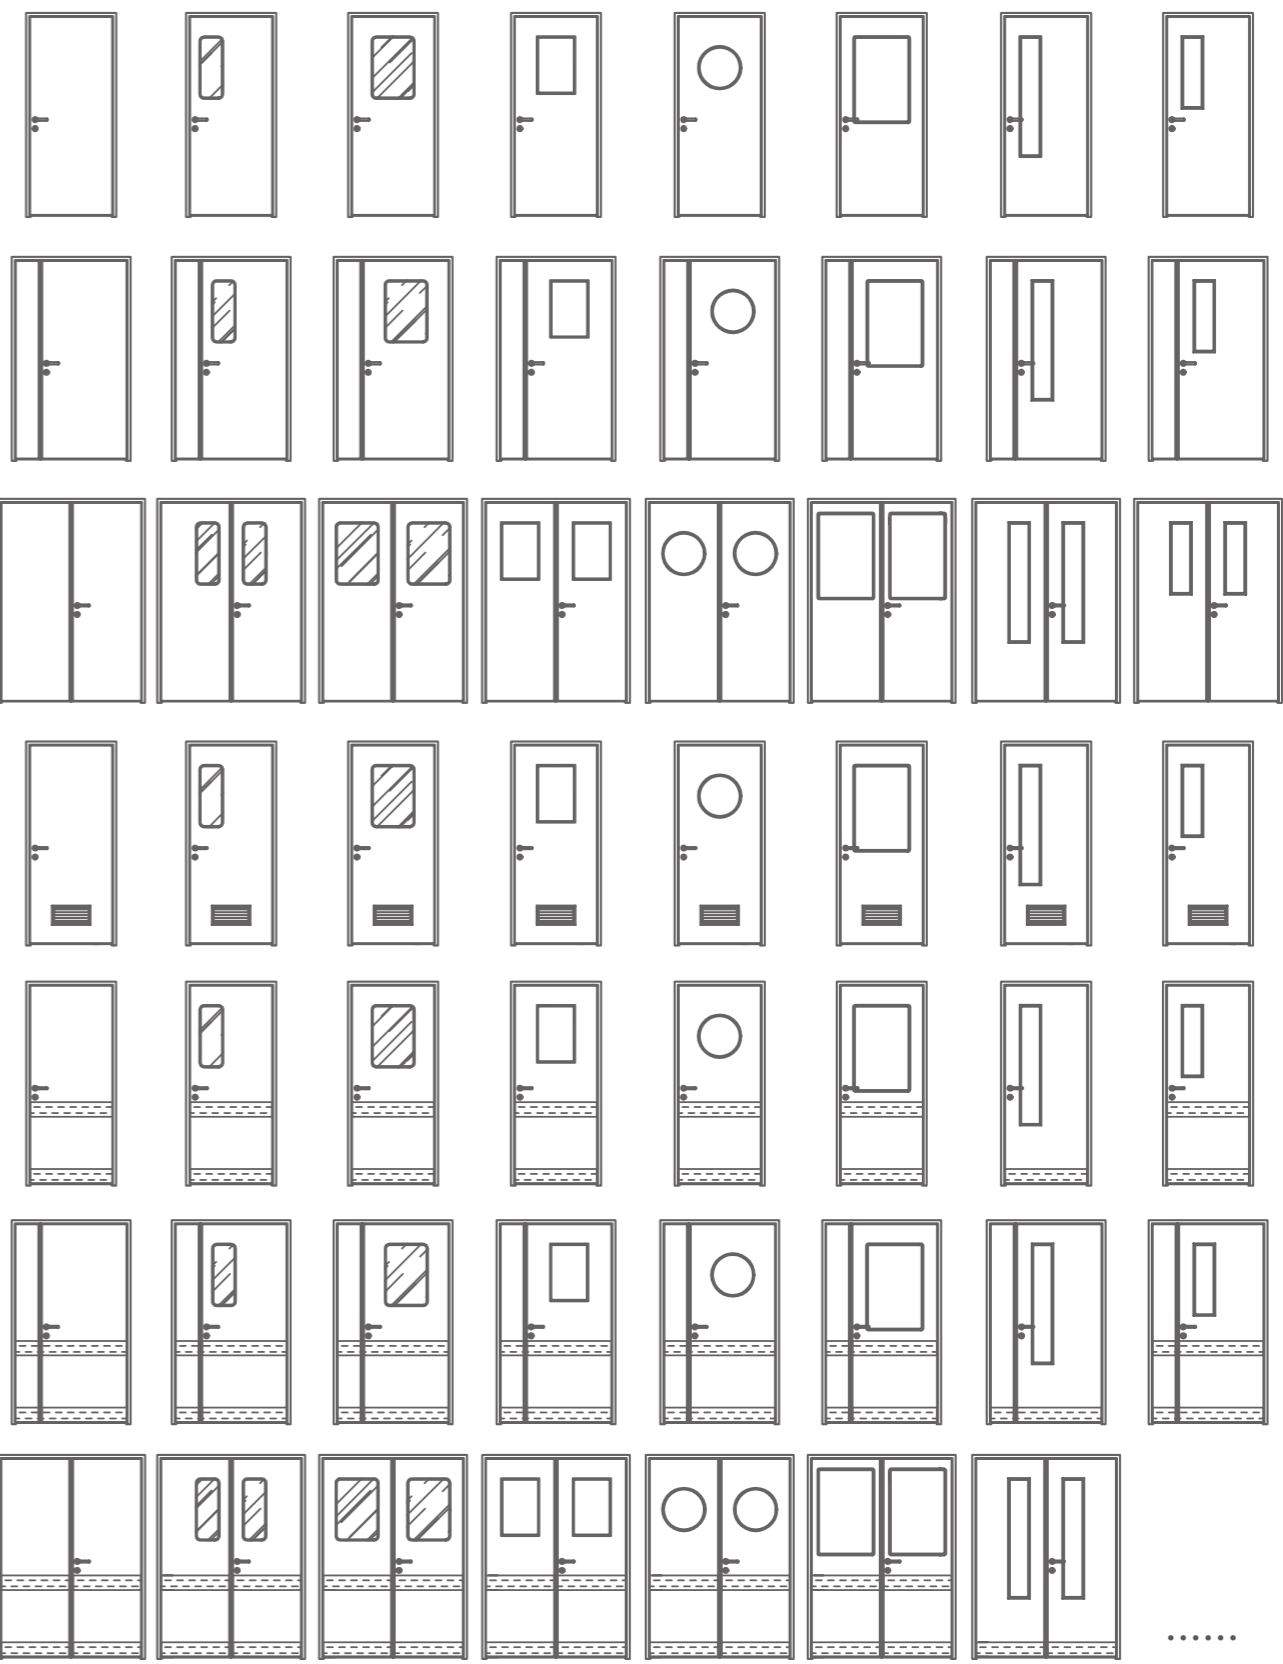

配件

Accessory




ST1001- 执手锁
Handle lock



ST1002- 分体锁
Split lock



ST1003- 雅洁锁
Spherical handle lock

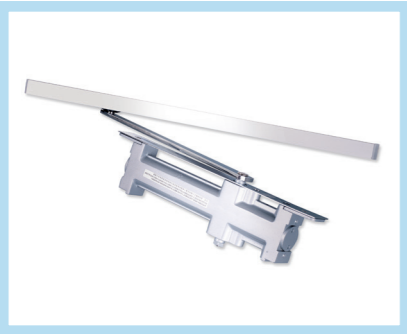

BMQ2001- 暗装闭门器
Hidden door closers



BMQ2002- 明装闭门器
Exposed door closers



BMQ2003- 地弹簧
Floor spring



MJ3001-50# 手工板合页
Handmake board hinge




MJ3002-50# 机制板合页
Machanism board hinge



MJ3003-40# 通用合页
Common hinge



MJ3004-40# 不锈钢合页
Stainless steel hinge

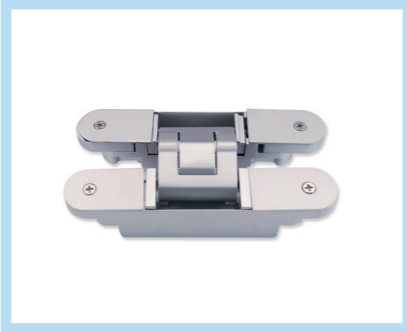

MJ3005- 暗装合页
Concealed hinge




微波感应探头
Microwave induction detector



磁卡门禁机
Magnetic card entrance guard machine



指纹考勤门禁机
Fingerprint attendance entrance guard machine

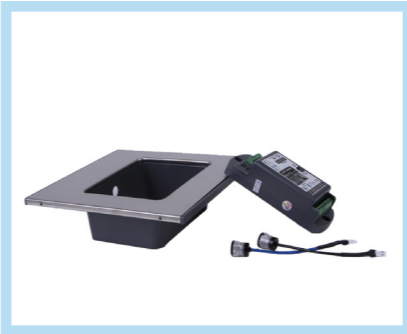

脚踏感应开关
Foot reaction switch



人脸识别开关
Face recognition switch




安全光线
Safety rays



金属出门开关
Metal exist switch



磁力锁
Magnetic lock

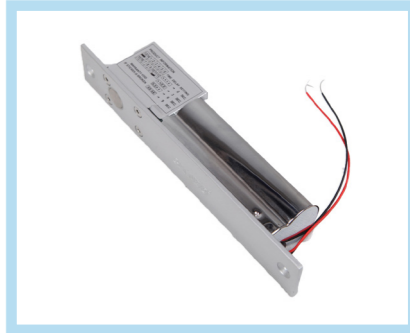


低温电锁
Low temperature electric lock



读卡密码盘
Card reader disk



平移自动门电机
Sliding automatic door motor

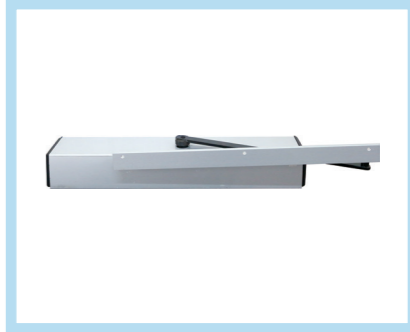

平开自动门电机
Swing automatic door motor



E-ZONG® 易众

广州市易众铝业有限公司

GUANGZHOU YIZHONG ALUMINUM INDUSTRY CO., LTD

佛山市易众洁净科技有限公司

FOSHAN EZONG CLEAN TECHNOLOGY CO., LTD.

Website: <http://www.yizhonglvye.com>

Mail: master@yizhonglvye.com

地址：广州市荔湾区花蕾路 99 号骏丰商务中心 8053 室

电话：020-81554508 / 81551627

传真：020-31020225

提货地址：东莞市寮步横坑南门新村 305 号

电话：0769-83520755

传真：0769-83520759

提货地址：佛山市南海区黄岐镇北村新世纪大街 2 号

电话：020-81114860/81122663/0757-85991846/85991845

传真：020-81120926